



# The Search for Dark Matter with Liquid Argon: DEAP, DarkSide, and ARGO

Christopher Jillings

SNOLAB/Laurentian University



on behalf of the **Global Argon Dark Matter Collaboration**



# Overview



- The Past and Present
  - DEAP-3600
- Needs of larger detectors
  - Underground argon – low in  $^{39}\text{Ar}$
  - Better control of surface backgrounds – coatings
  - Lower radioactivity light collection – from PMTs to SiPMs
- DarkSide-20k
- ARGO
- Getting there – the Canadian group's medium-term plans



# The Global Argon Dark Matter Collaboration



DEAP

DarkSide-50


MiniCLEAN

ArDM

## The GADMC



**First priority:**  
DarkSide-20k under construction at LNGS

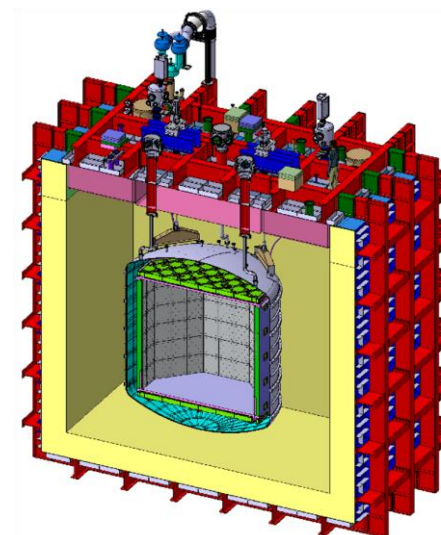


**Next: ARGO**



# DEAP-3600 ran successfully for 3 + years at SNOLAB and we are currently finalizing hardware upgrades




- 3300kg of atmospheric argon in a high radio-purity acrylic vessel.
- TPB wavelength shifter to convert VUV argon scintillation light into the optical
- Detected with 255 PMTs
- Outward looking PMTs in a water tank make the muon veto

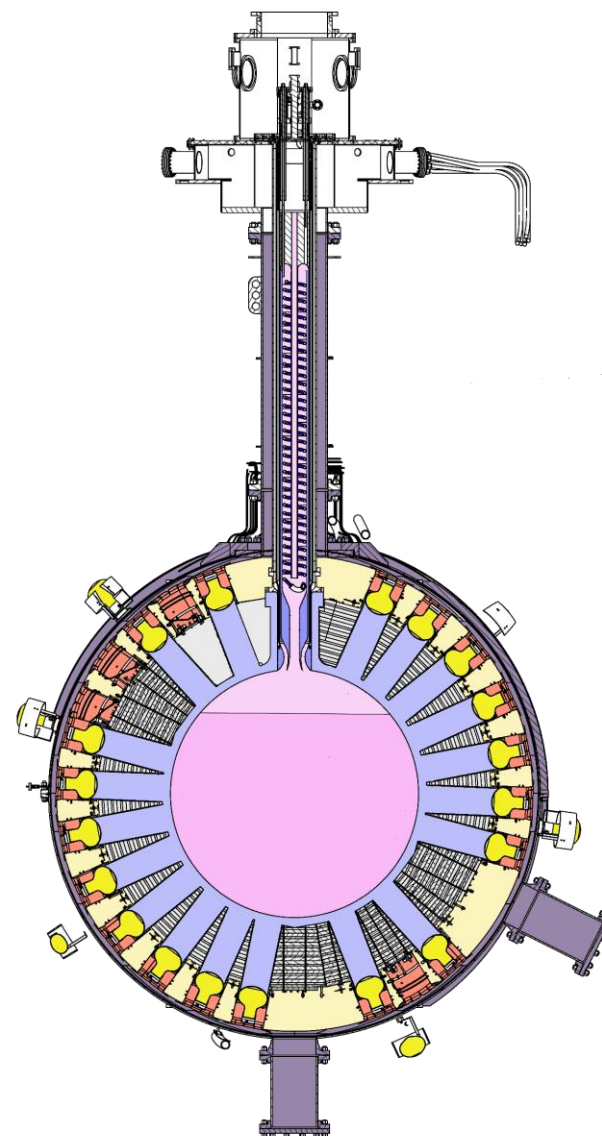



# Atmospheric Argon contains $^{39}\text{Ar}$ with a specific activity of $0.964 \pm 0.001 \text{ stat} \pm 0.024 \text{ sys Bq/kg}$

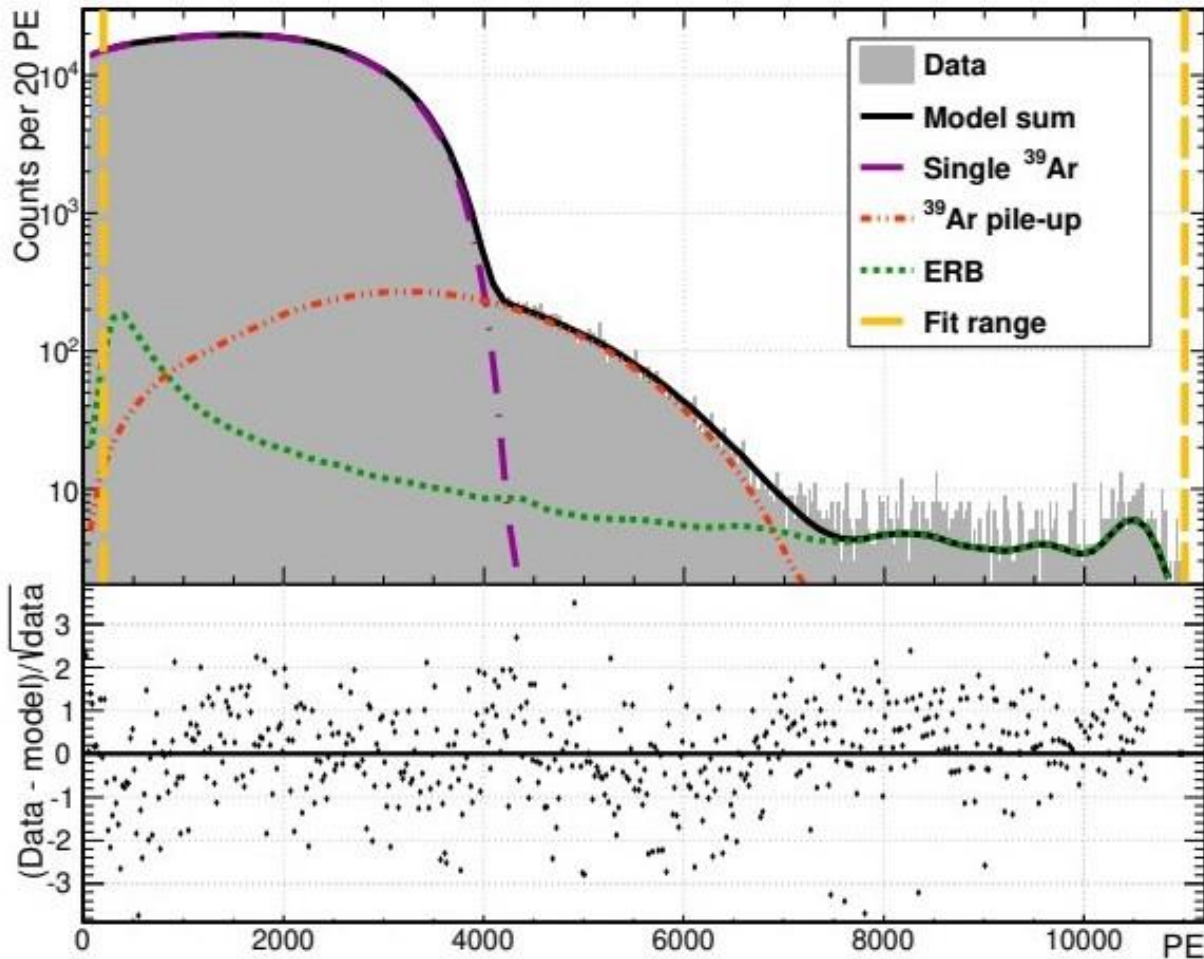

- $^{39}\text{Ar}$  is created in the atmosphere from  $^{40}\text{Ar}(n,2n)$
- Half life of 268y
- Endpoint  $565 \pm 5 \text{ keV}$

→ Find argon in underground gas, extract it, purify it and store underground for use.


<https://arxiv.org/abs/2302.14639>





# Pulse-Shape Discrimination in Liquid Argon Works!



<http://arxiv.org/abs/2001.09855>

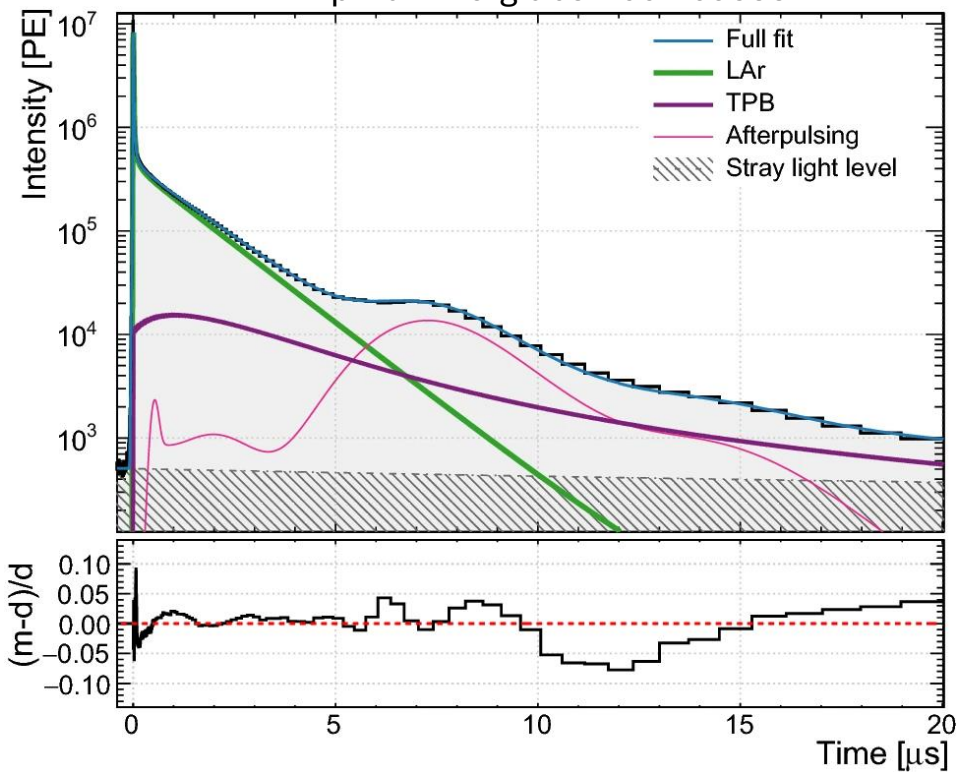

Liquid argon pulse shapes, including instrumental effects such as PMT afterpulsing and stray light are well understood.

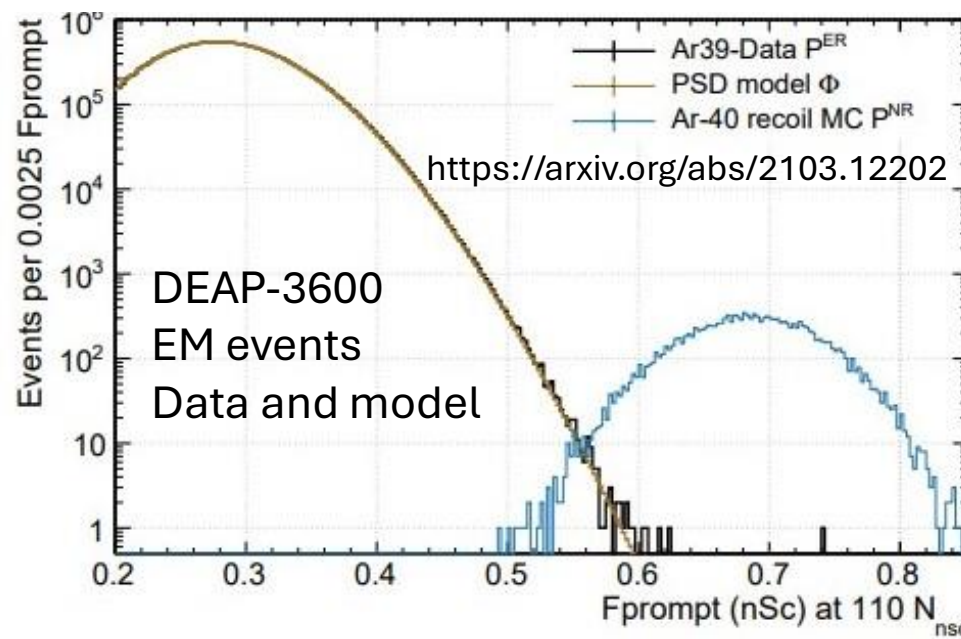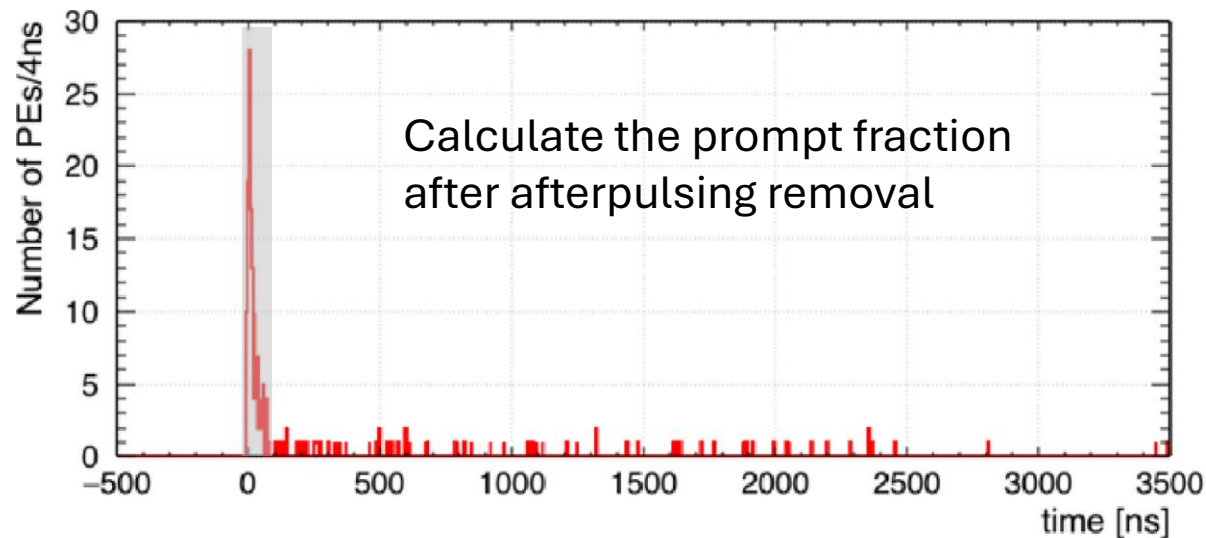




# Data at $\sim 18 \text{ keV}_{ee}$



Leakage probability  
of EM events

Nuclear recoil  
acceptance

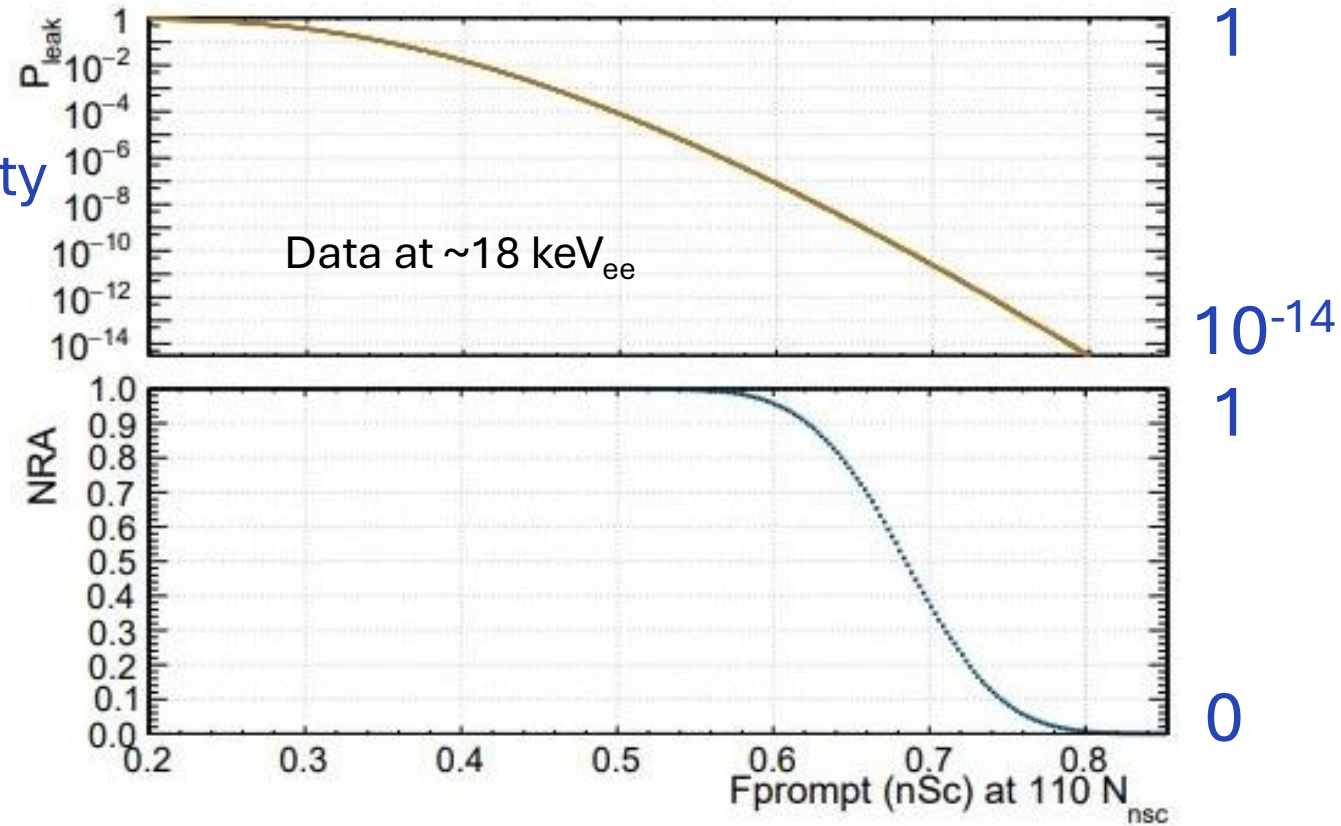

(b)

The PSD  
demonstrated in  
DEAP-3600 is  
sufficient for ARGO






# DEAP-3600 set the most stringent limit on WIMP-nucleon coupling using Argon




<https://arxiv.org/abs/1902.04048>

Zero events in ROI (with two near misses)

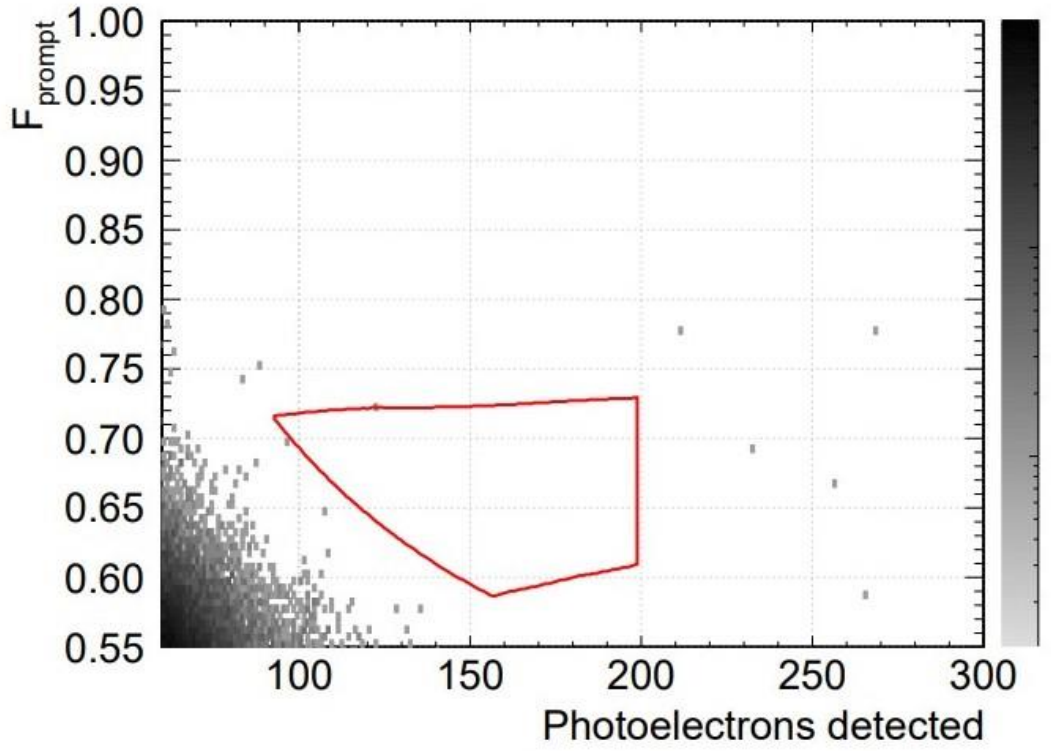

Counts/(1 PE bin)/(0.005  $F_{\text{prompt}}$  bin)

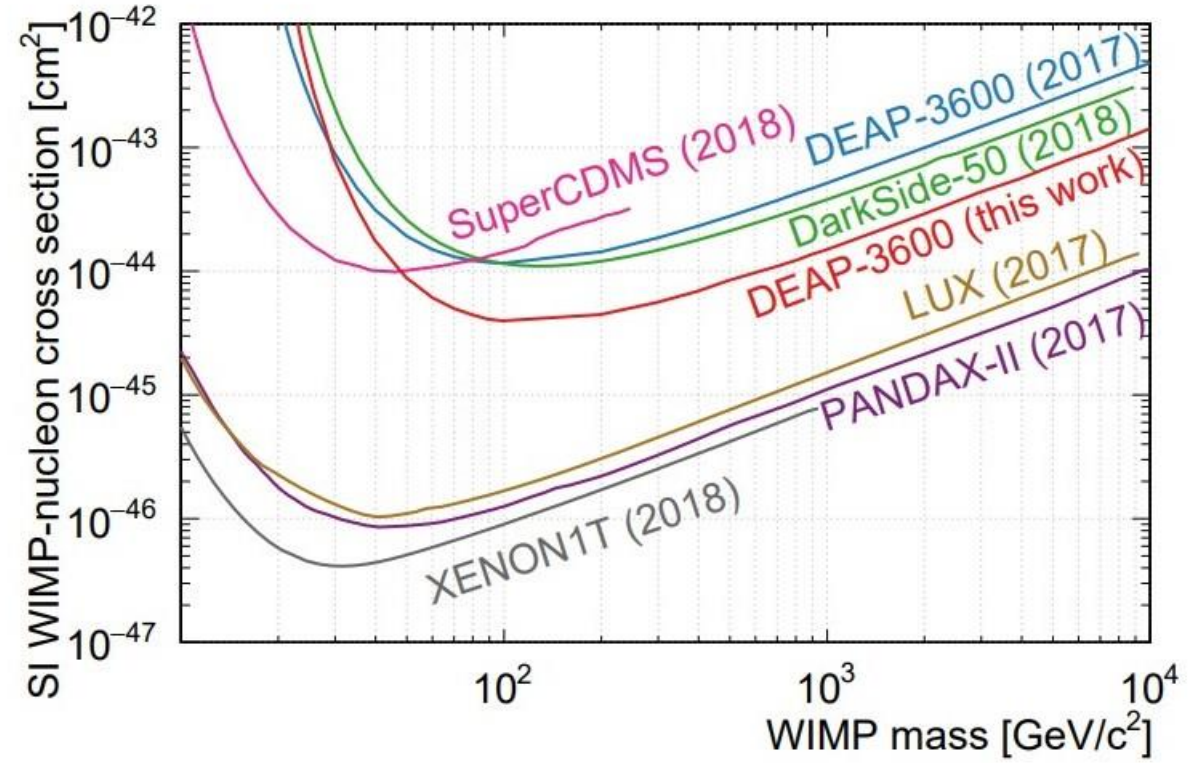






# DEAP-3600 expanded that analysis taking into account Effective Field Theory and Galactic Models




<http://arxiv.org/abs/2005.14667>

$$\frac{dR}{dE_R} = \frac{\rho_T}{m_T} \frac{\rho_\chi}{m_\chi} \varepsilon(E_R) \int_{v_{\min}}^{\infty} v f_\chi^\oplus(\vec{v}) \frac{d\sigma}{dE_R} d^3\vec{v}$$

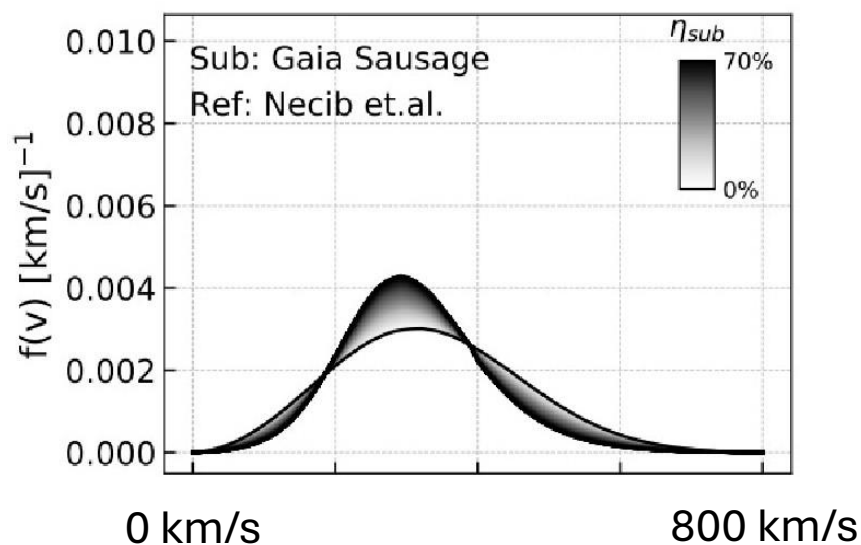

- $\mathcal{O}_1 = 1_\chi 1_N$
- $\mathcal{O}_3 = i\vec{S}_N \cdot \left(\frac{\vec{q}}{m_N} \times \vec{v}_\perp\right)$
- $\mathcal{O}_5 = i\vec{S}_\chi \cdot \left(\frac{\vec{q}}{m_N} \times \vec{v}_\perp\right)$
- $\mathcal{O}_8 = \vec{S}_\chi \cdot \vec{v}_\perp$
- $\mathcal{O}_{11} = i\vec{S}_\chi \cdot \frac{\vec{q}}{m_N}$
- $\mathcal{O}_{12} = \vec{v}_\perp \cdot (\vec{S}_\chi \times \vec{S}_N)$
- $\mathcal{O}_{15} = -\left(\vec{S}_\chi \cdot \frac{\vec{q}}{m_N}\right) \left[ (\vec{S}_N \times \vec{v}_\perp) \cdot \frac{\vec{q}}{m_N} \right]$

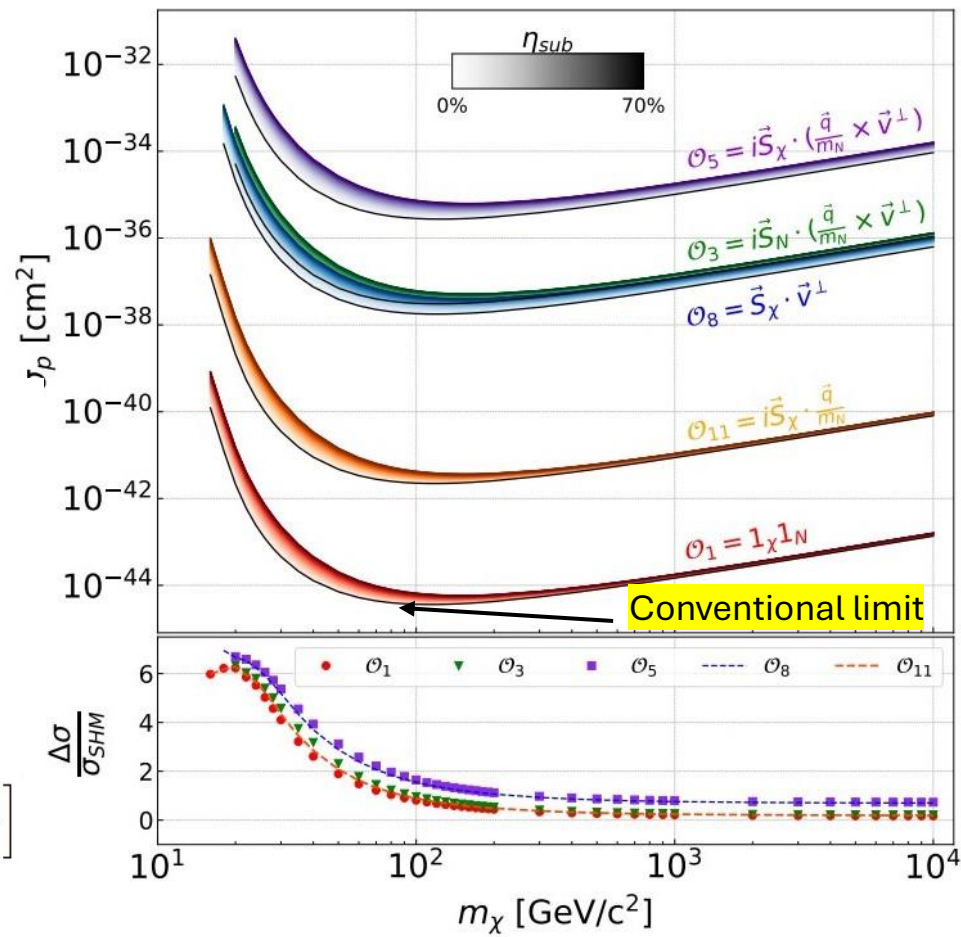

(one of 16 velocity distributions considered)




(a) Gaia Sausage (Necib et al.) [60]



# DEAP-3600 searched for Planck-scale dark matter





These interact many times traversing the detector and give large and unique signals.

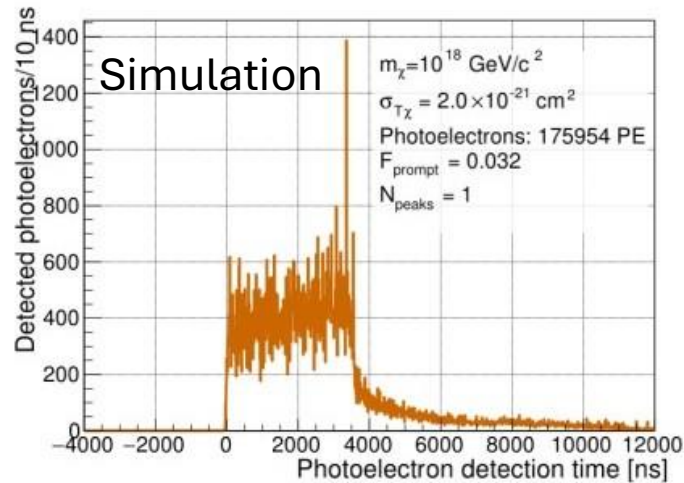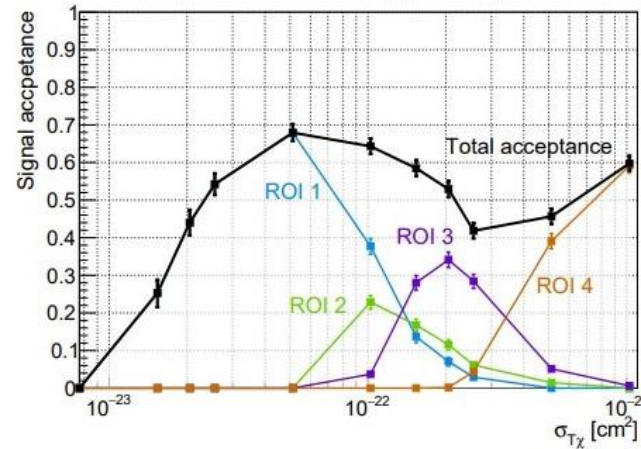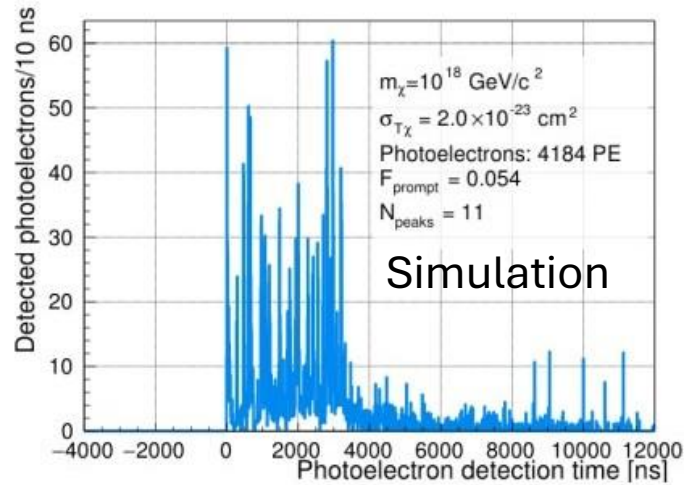

DEAP produced world-leading limits

<https://arxiv.org/abs/2108.09405>

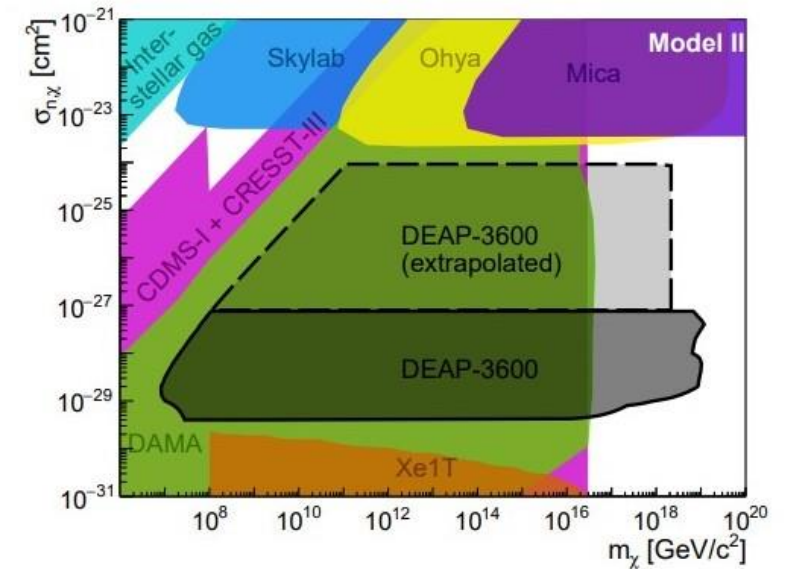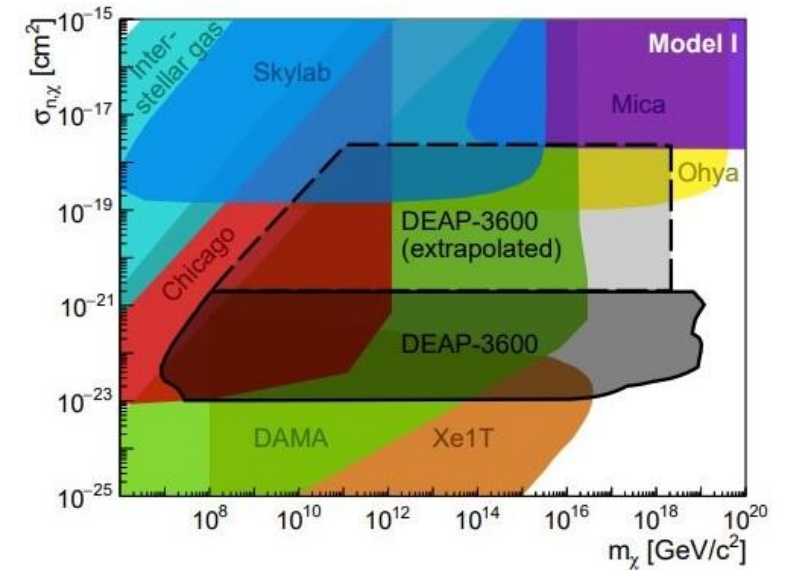



# Six Five analyses to complete this year



- A Profile-Likelihood Ratio dark matter search using the entire second-fill data set.
- A measurement of the lifetime of Argon-39.
- A search for Boron-8 solar neutrinos.
- A search for a 5.5 MeV solar axion.
- A muon-flux measurement.
- A measurement of alpha-particle quenching in liquid argon.
  - Submitted to EPJC



The hardware upgrades will allow us to reach DEAP-3600 design sensitivity, allow us to verify the DEAP background model, and allow us to have a “zero background” data set.

**DEAP-3600 in the second fill had ~1 event in the ROI / tonne year**

Getting to zero is an exciting prospect and would make us unique for a detector of this scale.






The hardware upgrades will allow us to reach DEAP-3600 design sensitivity, allow us to verify the DEAP background model, and allow us to have a “zero background” data set.

1. Dust removal
  1. Liquid recirculation from detector
  2. Improved filtration on process systems
2. Elimination of neck events
  1. Scintillating coatings to tag neck alphas with PSD
  2. Possible external cooling to allow neck to stay warm
3. Replace faulty VETO PMTs
4. Many maintenance/process improvements



# DEAP-3600 background model contains two alpha backgrounds that require mitigation

Alpha decay in dust in the bulk liquid naturally reconstructs in the middle of the detector

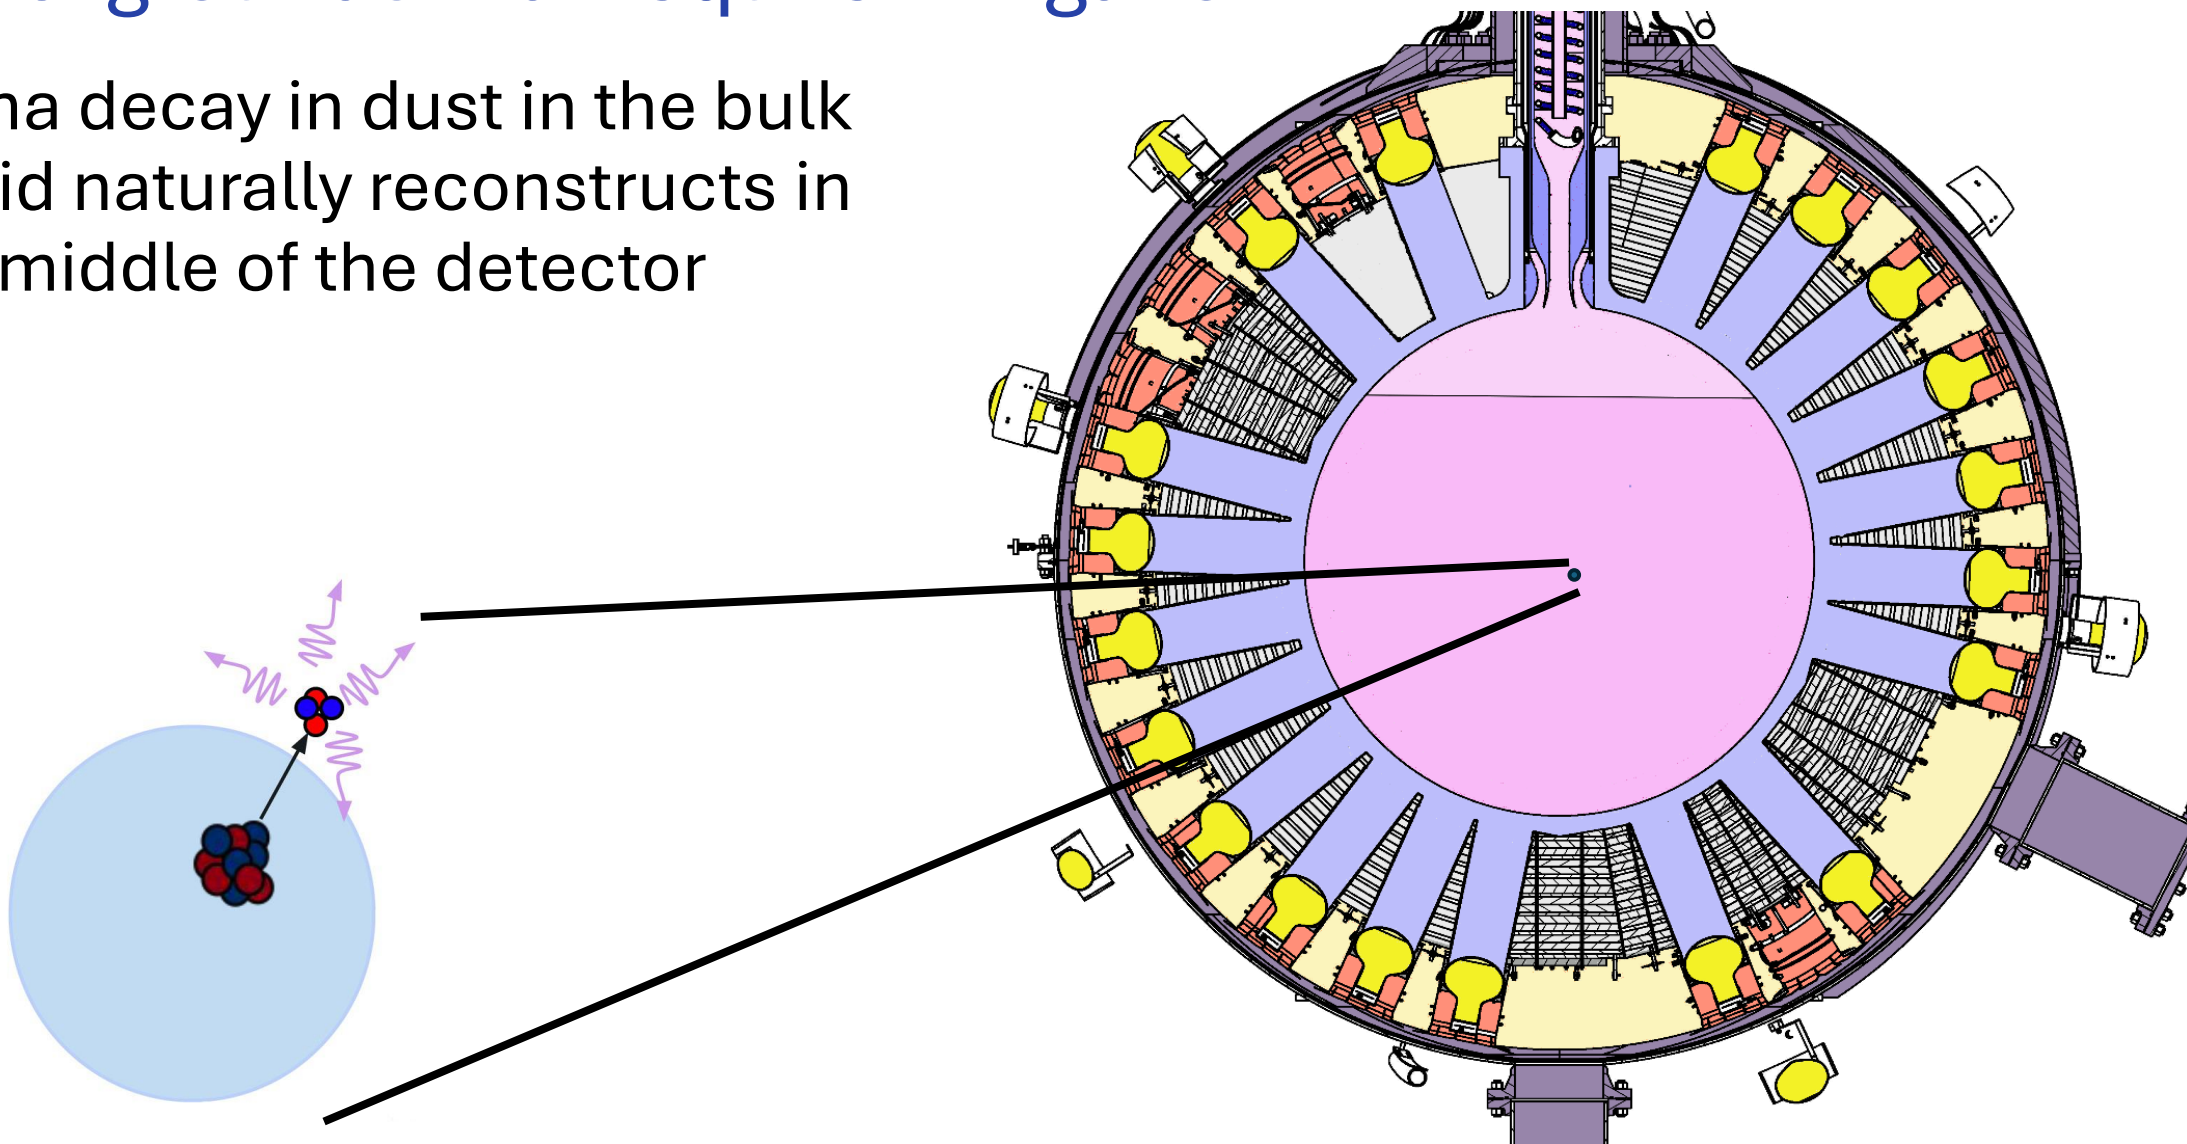

# DEAP-3600 background model contains two alpha backgrounds that require mitigation



Alpha decay in the neck allows for a small fraction of light to enter the main detector

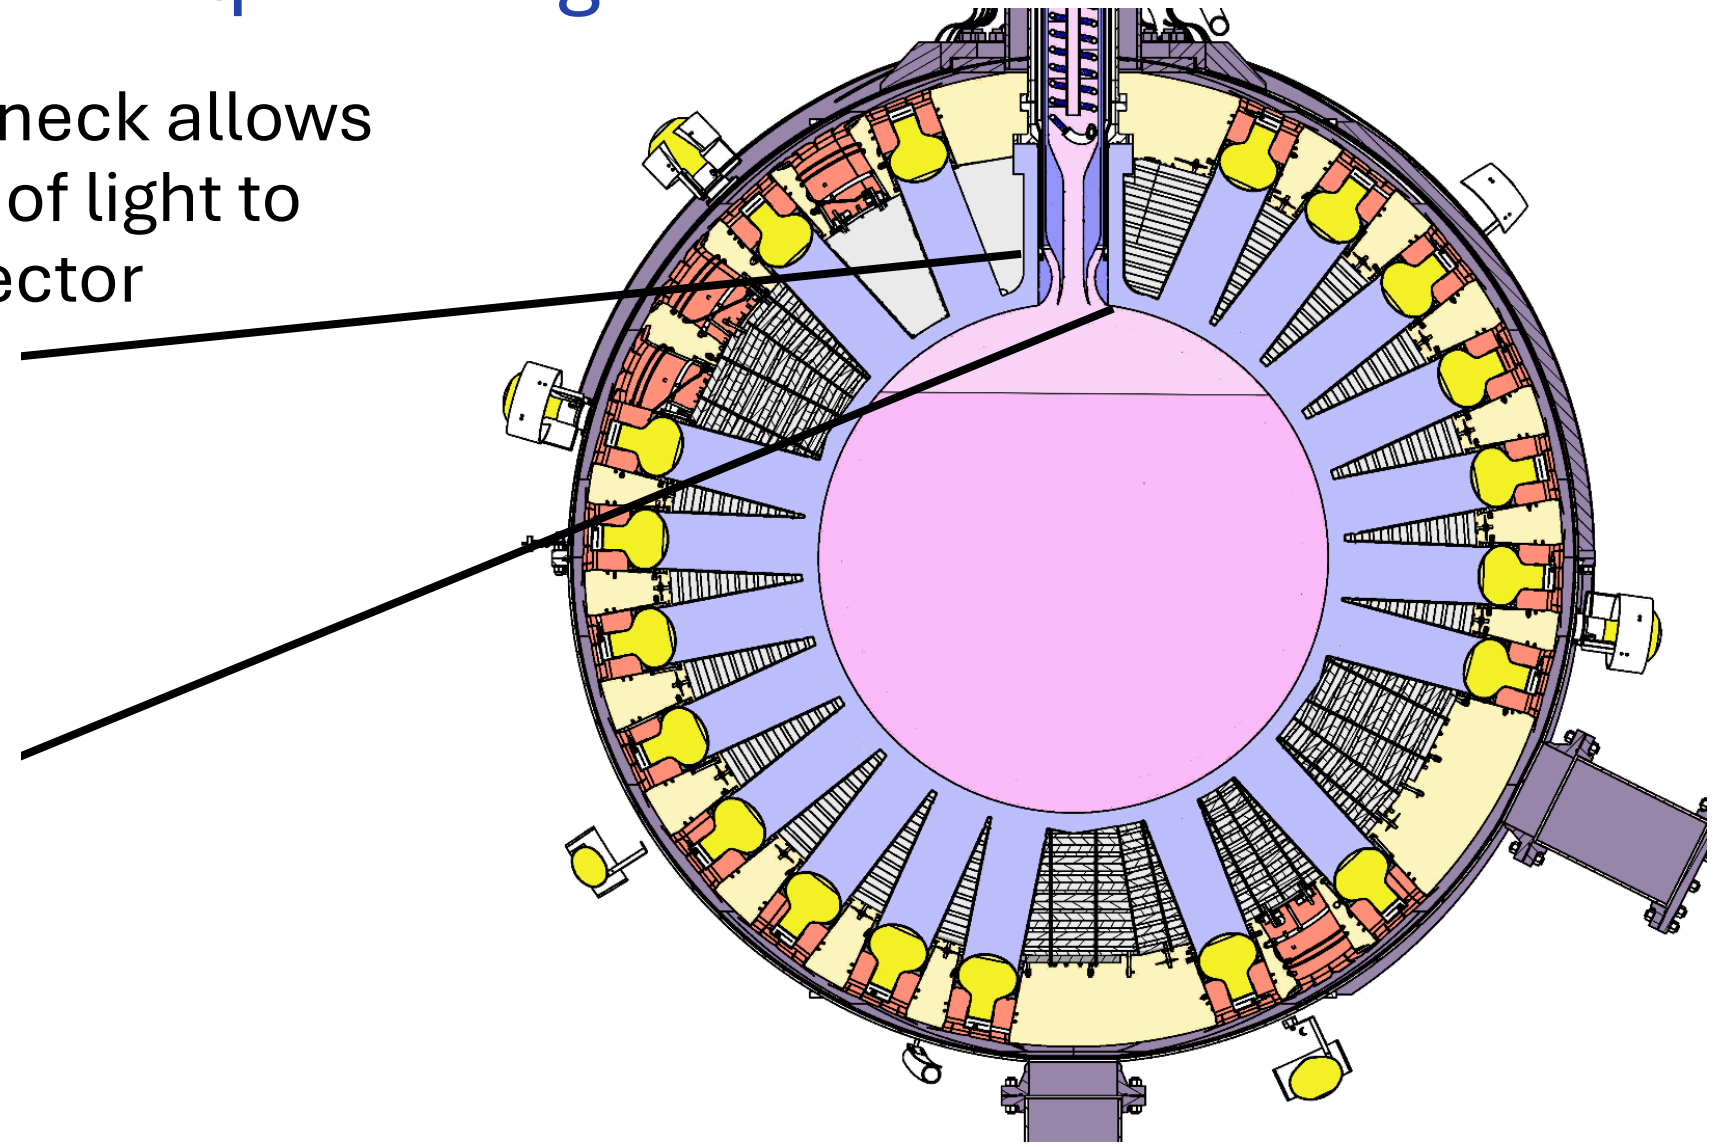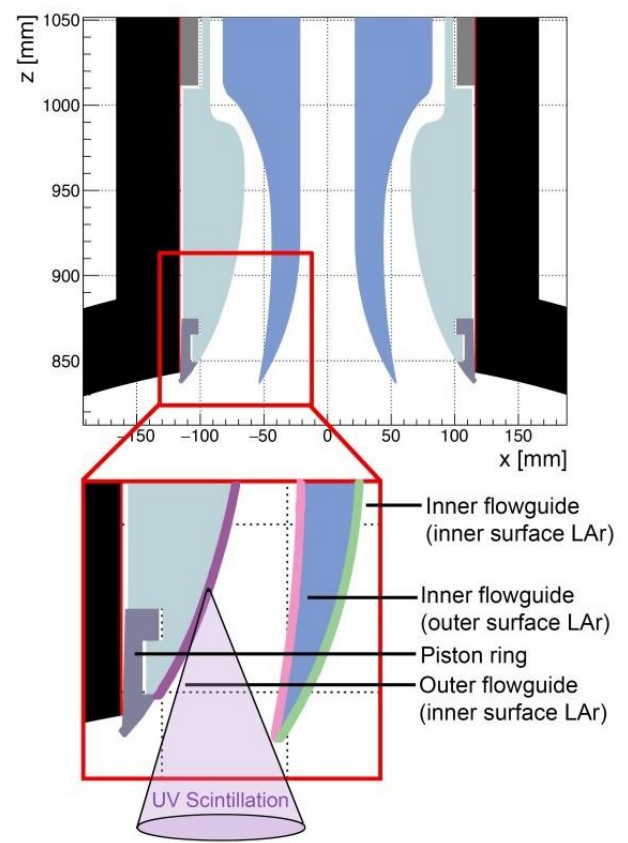




# Upgrades

Position of  
deployed  
particulate  
removal tube

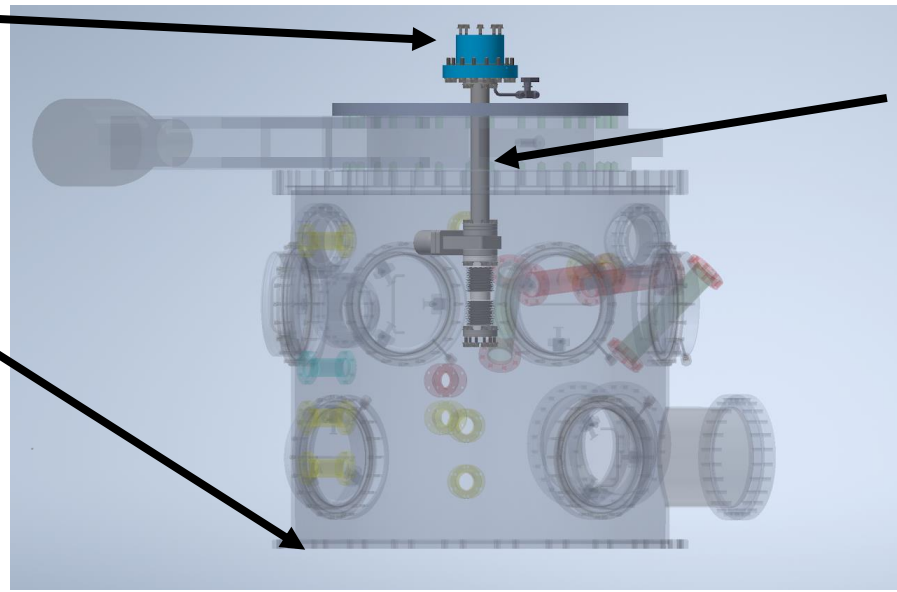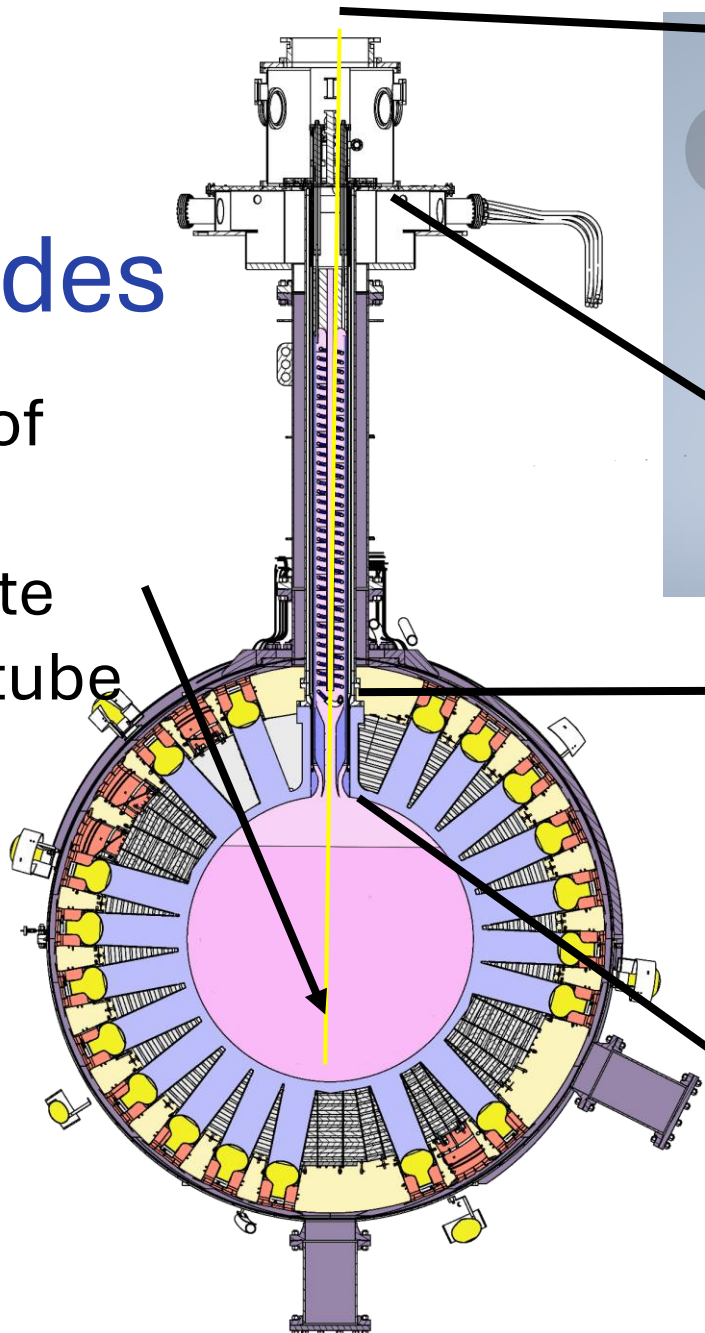

New radon-tight  
deployment  
system for  
particulate  
removal/external  
cooling

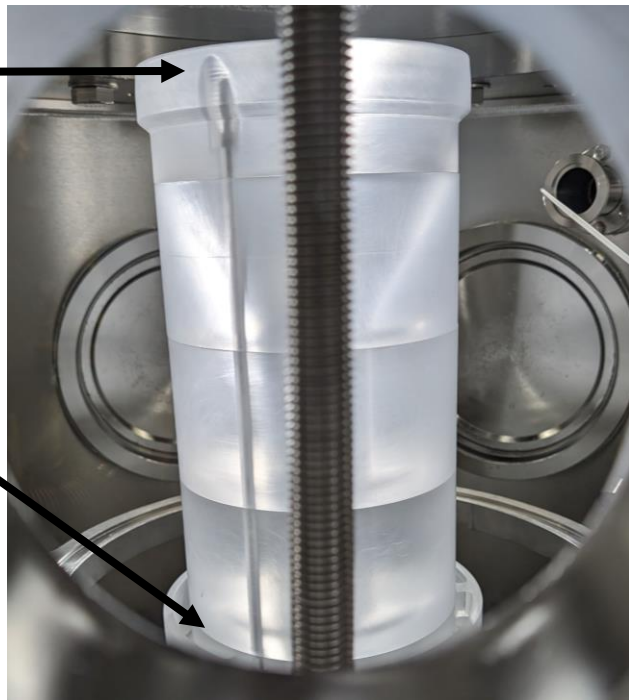

Replacement acrylic  
flowguide assembly  
made in Rn-clean  
room and coated  
with pyrene-doped  
polystyrene





The Global Argon Dark Matter Program -SNOLAB Users Meeting - June 26, 2024





# Run Plan for DEAP-3600 Third Fill



- After filling to  $\sim 500\text{kg}$ , will operate the liquid removal tube to remove dust.
- We will run the third fill as the second:
  - Same fill level
  - Automated weekly analysis based on second-fill cuts to search for dark matter, study dust and neck-event sidebands
- Will deploy Kr-83m source
- One year physics data live time.



# Overview



- The Past and Present
  - DEAP-3600
- Needs of larger detectors
  - Underground argon – low in  $^{39}\text{Ar}$
  - Better control of surface backgrounds – coatings
  - Lower radioactivity light collection – from PMTs to SiPMs
- DarkSide-20k
- ARGO
- Getting there – the Canadian group's medium-term plans



# DEAP-3600 the largest detector you can make with atmospheric argon



Argon signal is about 10 microseconds long

At 1 Bq/kg and 3300kg in DEAP-3600,

**~3.3% of events contain random Ar-39 pile-up**






# Industrial Scale Underground Argon Production




- **Production: Urania**
- **Cortez, CO**
- Industrial scale extraction plant
- Extraction rate: 250-330 kg/day
- Production capability  $\approx$  120 t over two years
- UAr purity: three-four nines

- **Production: Aria**
- **Sardinia, Italy**
- Industrial scale extraction plant
- 350 m cryogenic distillation column
- O(1 tonne)/day capability
- UAr purity: > six nines
- Ultimate goal: isotopic separation

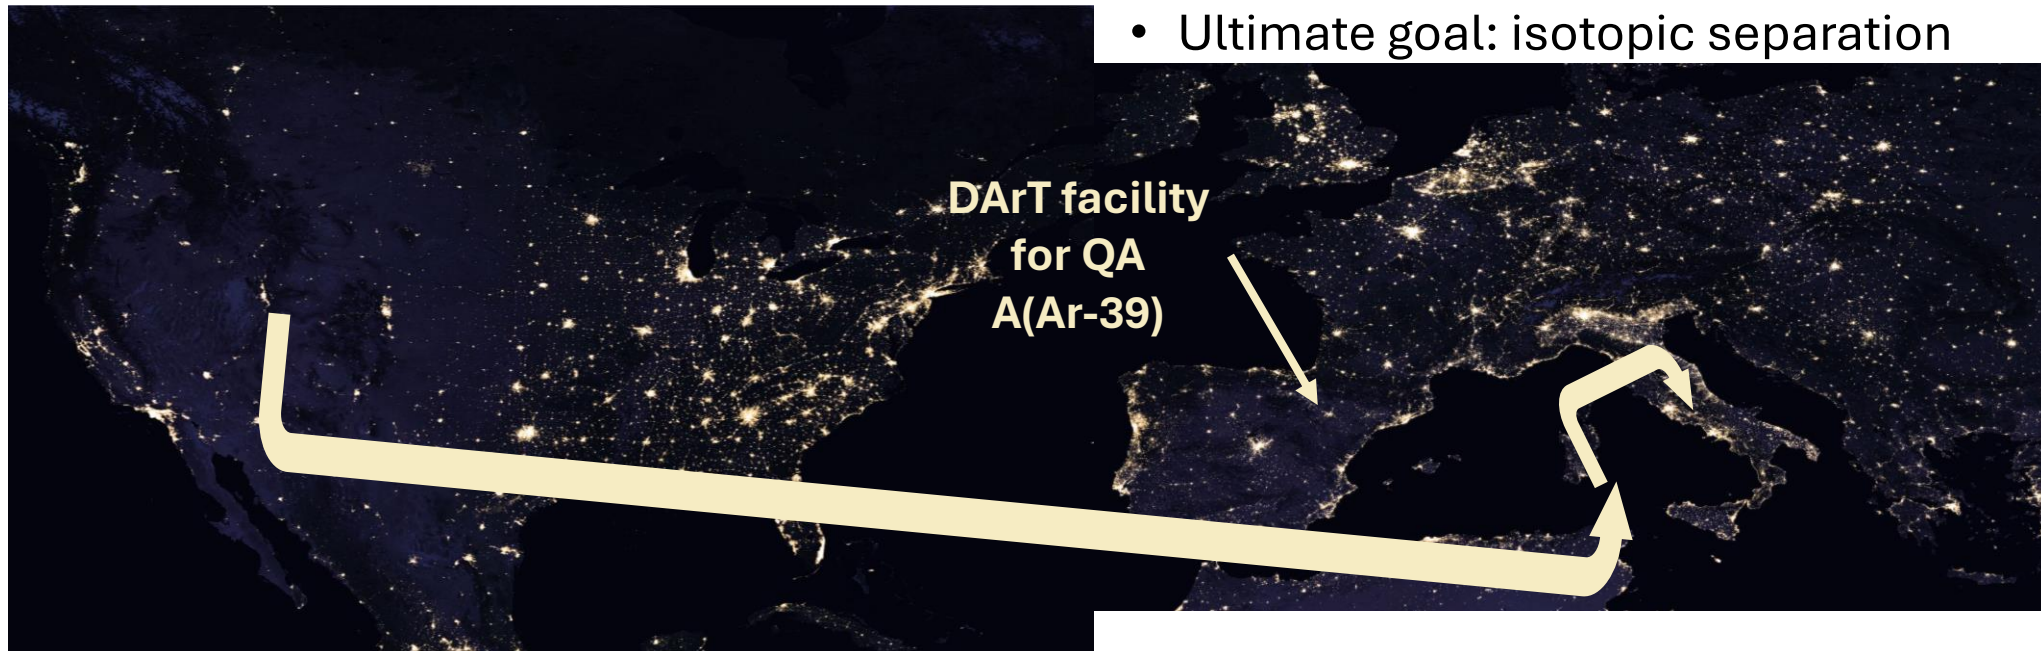



# The Urania Plant at Kinder Morgan

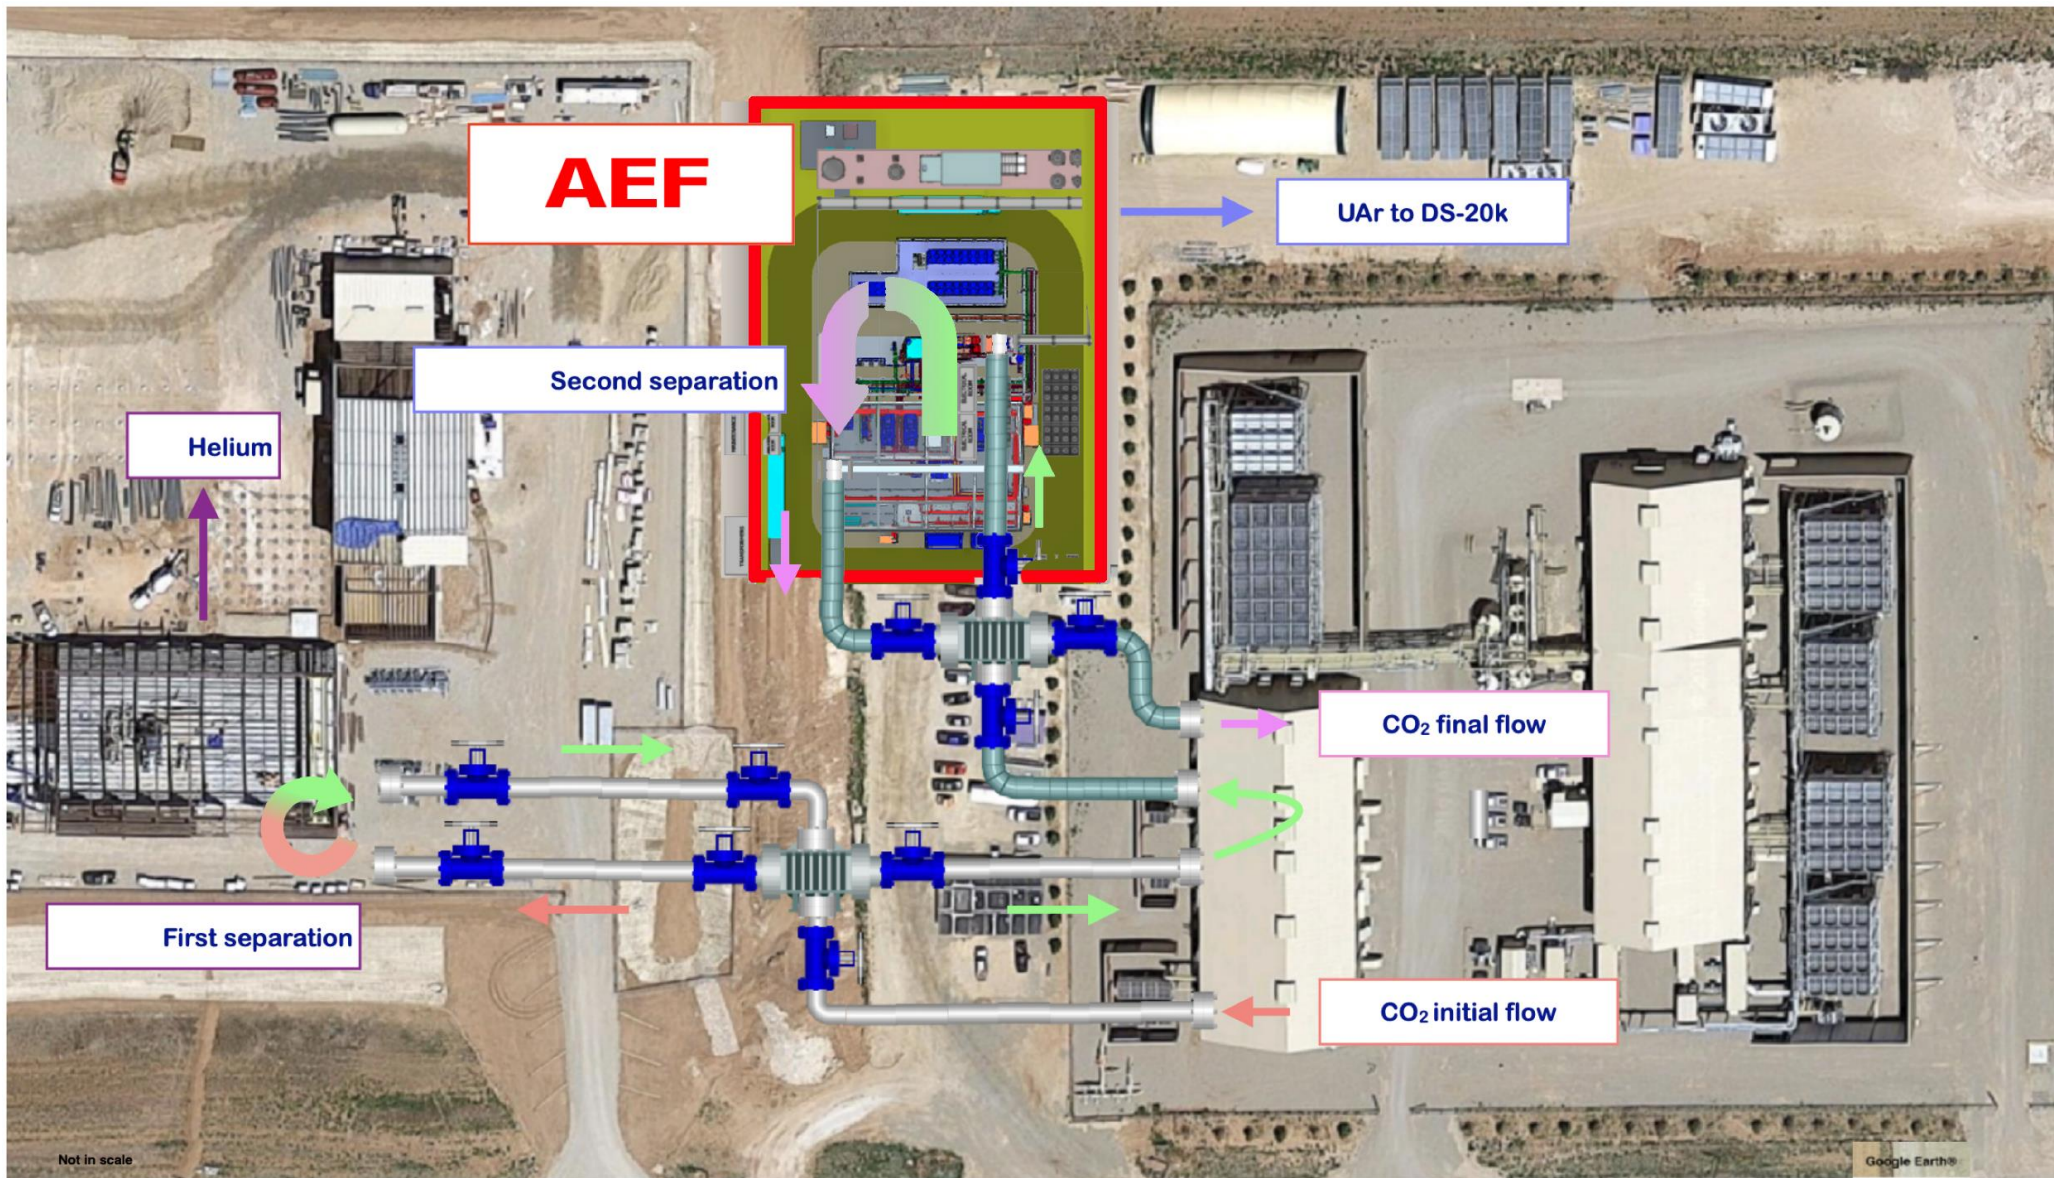






# The ARIA Prototype runs were successful

- The prototype tower is 26m tall
- Isotopic separation of Ar-36, Ar-38, and Ar-40 has been demonstrated.

<https://doi.org/10.1140/epjc/s10052-021-09121-9>

<https://doi.org/10.1140/epjc/s10052-023-11430-0>

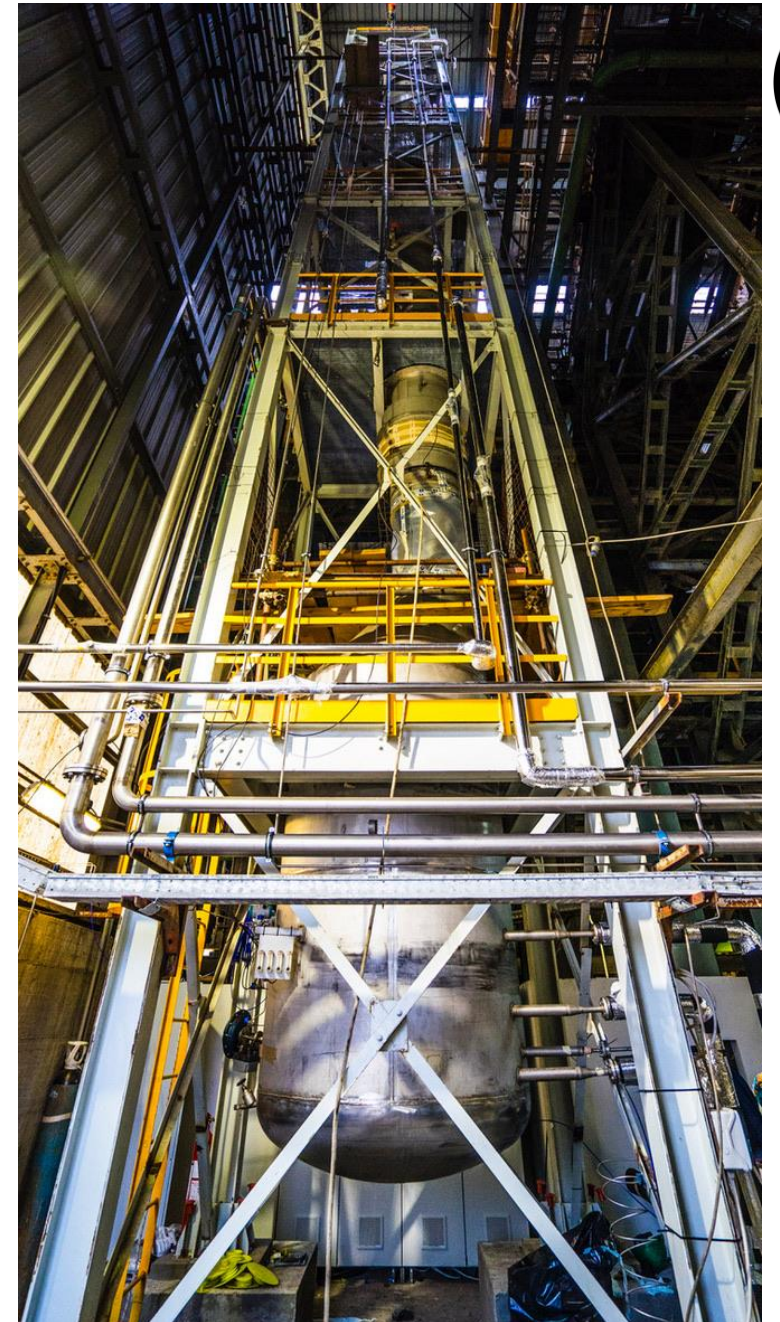

0.36% top of tower




Ratio Ar-36/Ar-40

0.28% feed



0.25% bottom

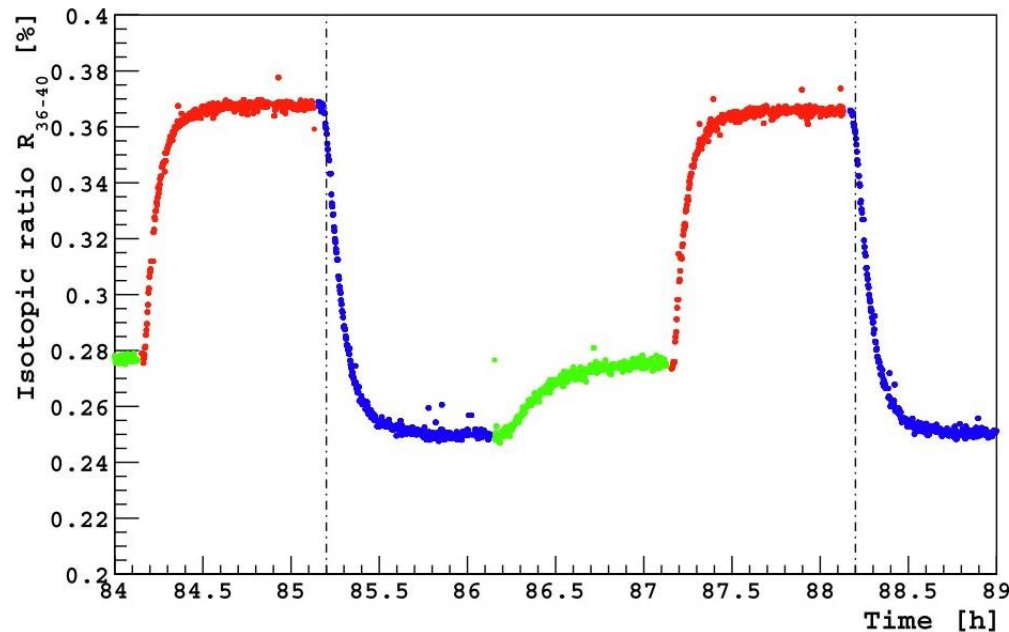



# The DArT in ArDM QA detector measures $A(\text{Ar-39})$ in $\sim \text{kg}$ samples in 1 week





DOI 10.1088/1748-0221/15/02/P02024

ArDM acts as Compton suppression and veto detector.

Use atmospheric argon to calibrate the signal shape.

1400x depletion measured with 7% statistical error.

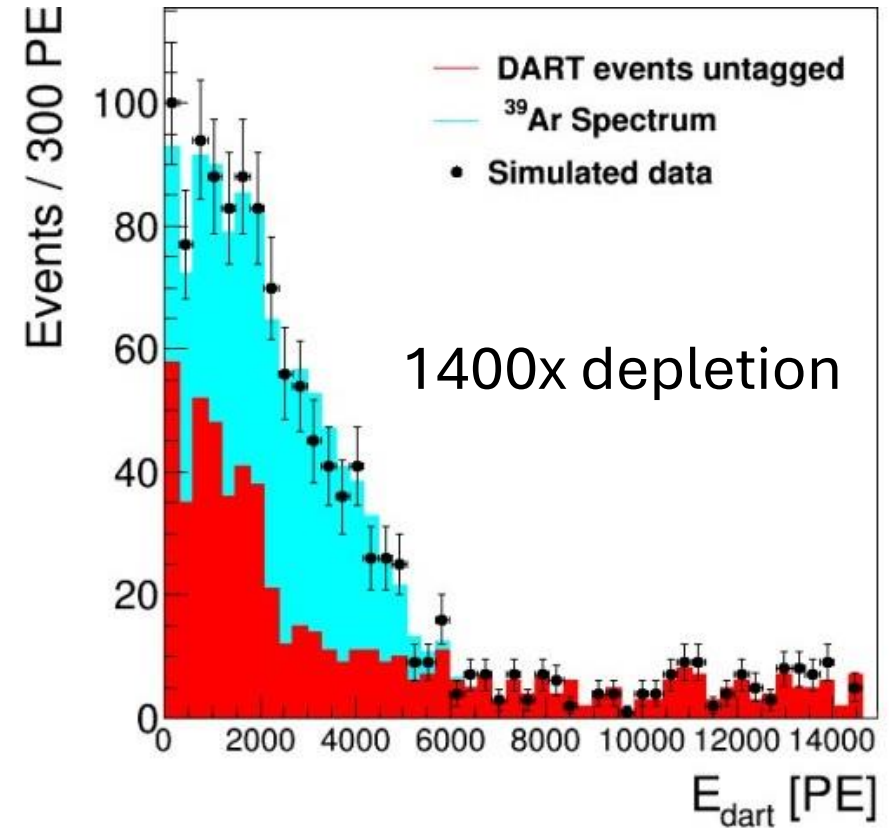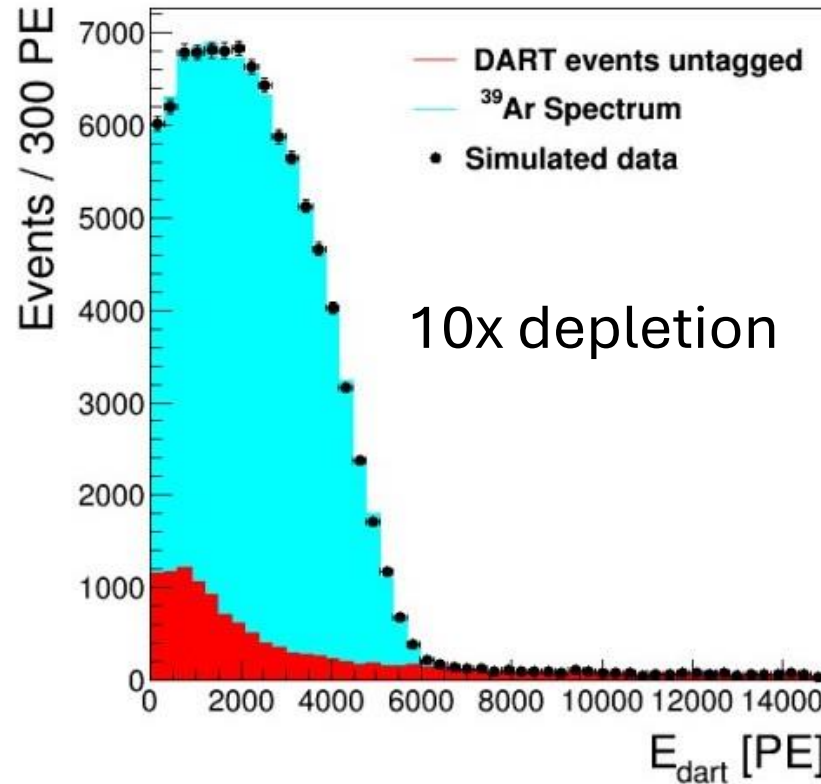

**Figure 8.** Photo-electron spectra corresponding to one week of data taking, (left) for an  $^{39}\text{Ar}$   $DF = 10$  without lead shield and (right) for  $DF = 1400$  with lead shield. The red (dark) histogram represents the background spectrum, the blue (light) histogram is the  $^{39}\text{Ar}$  signal and the black dots denote the simulated data.






# Larger detectors will require improved control of backgrounds from surfaces



- Detectors are built with large volumes and we use position reconstruction to suppress events from surfaces.
- Exposure of surface to Rn builds up  $^{210}\text{Pb}$  (22.3 yr half life)
- $^{210}\text{Po}$  (138 day half life) produces alphas that mimic WIMP signals.

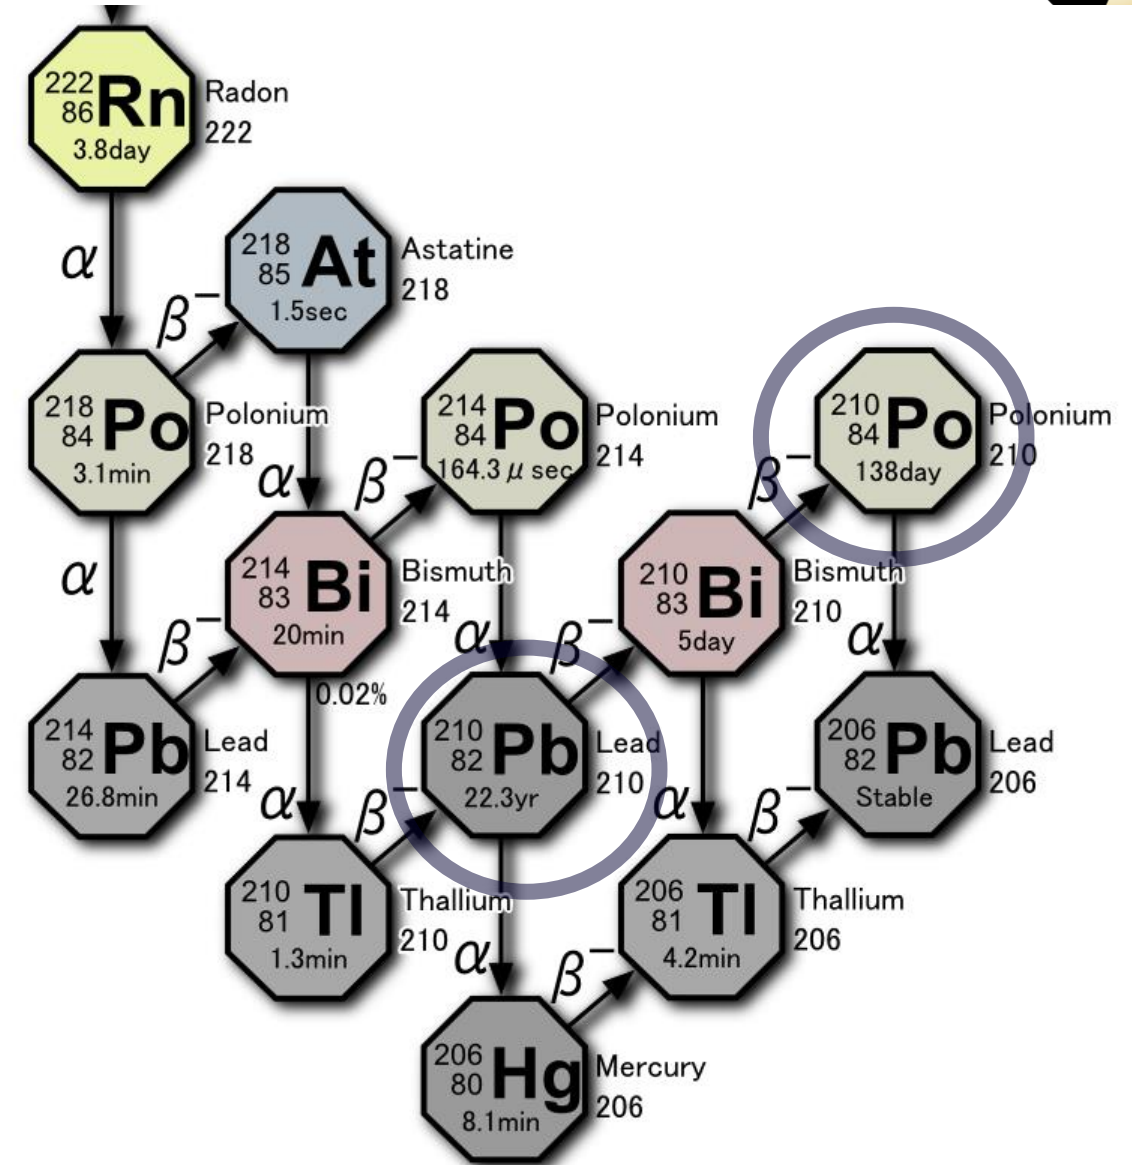


Pyrene doped polystyrene is excited by VUV light from argon scintillation.

The pyrene has a scintillation time of  $\sim 280$  ns and results in a pulse shape different from WIMP interactions in argon.

Need to develop large-area coatings that allow suppression of alpha decays from surfaces in generation 3 experiments.

<https://arxiv.org/abs/2109.06819>

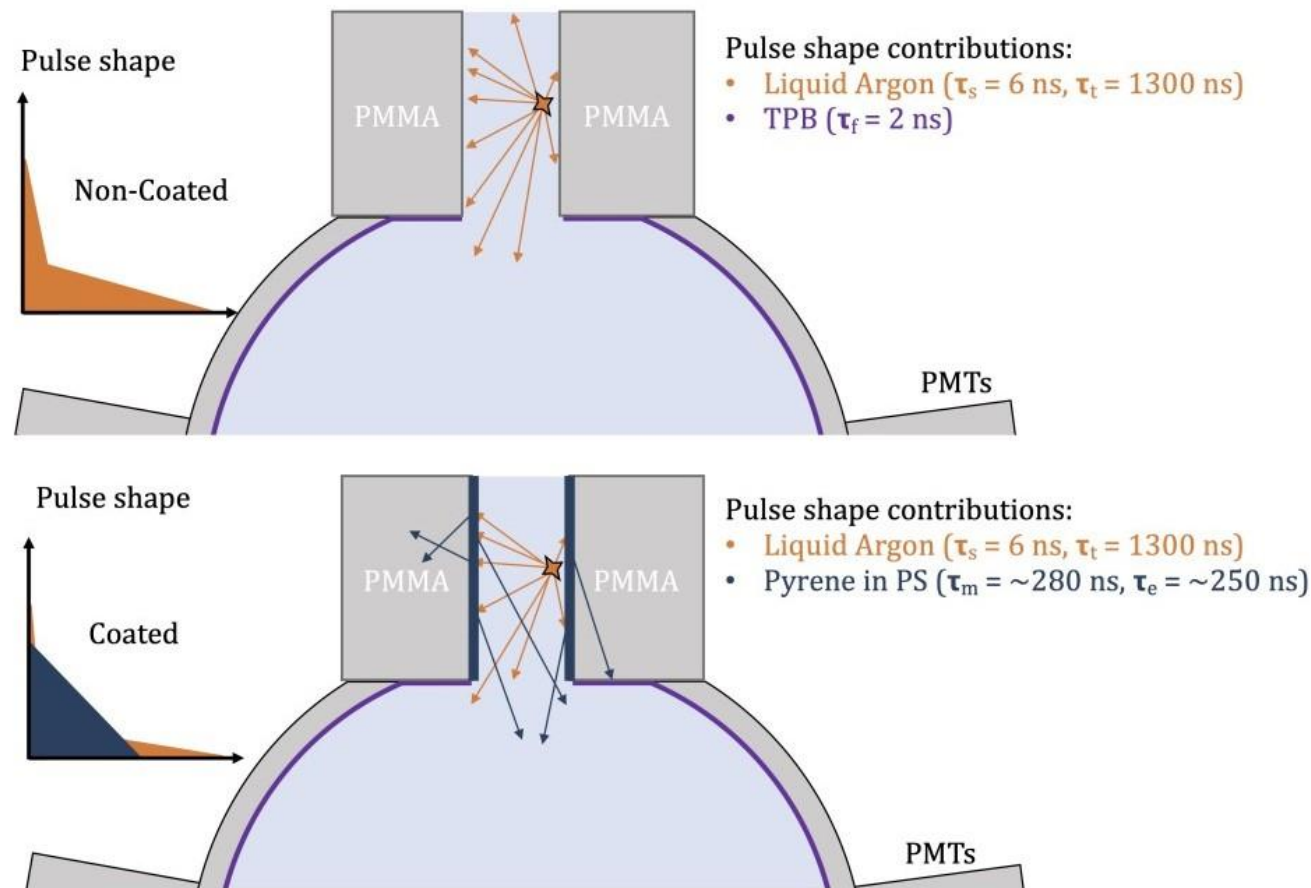

**Figure 1:** Top:  $\alpha$  scintillation event occurs in the neck of the DEAP-3600 detector, VUV scintillation light is absorbed by the acrylic of the neck and produces a shadowed low energy, highly prompt, event that mimics a potential dark matter signal. Bottom: VUV light from  $\alpha$  scintillation in argon is absorbed by the pyrene + PS film coating and is shifted to visible and delayed by the time constant of the film. This produces events with a strong "intermediate" component that can be tagged efficiently using PSD, as illustrated by the inlaid pulse shapes.






# DarkSide-20k and ARGO Require Improved Photon Detection



Conventional photomultiplier tubes are great, but:

1: They are made of glass, which is radioactive by our standards


2: The glass contains Boron (Borosilicate glass) which has a high  $(\alpha, n)$  cross section

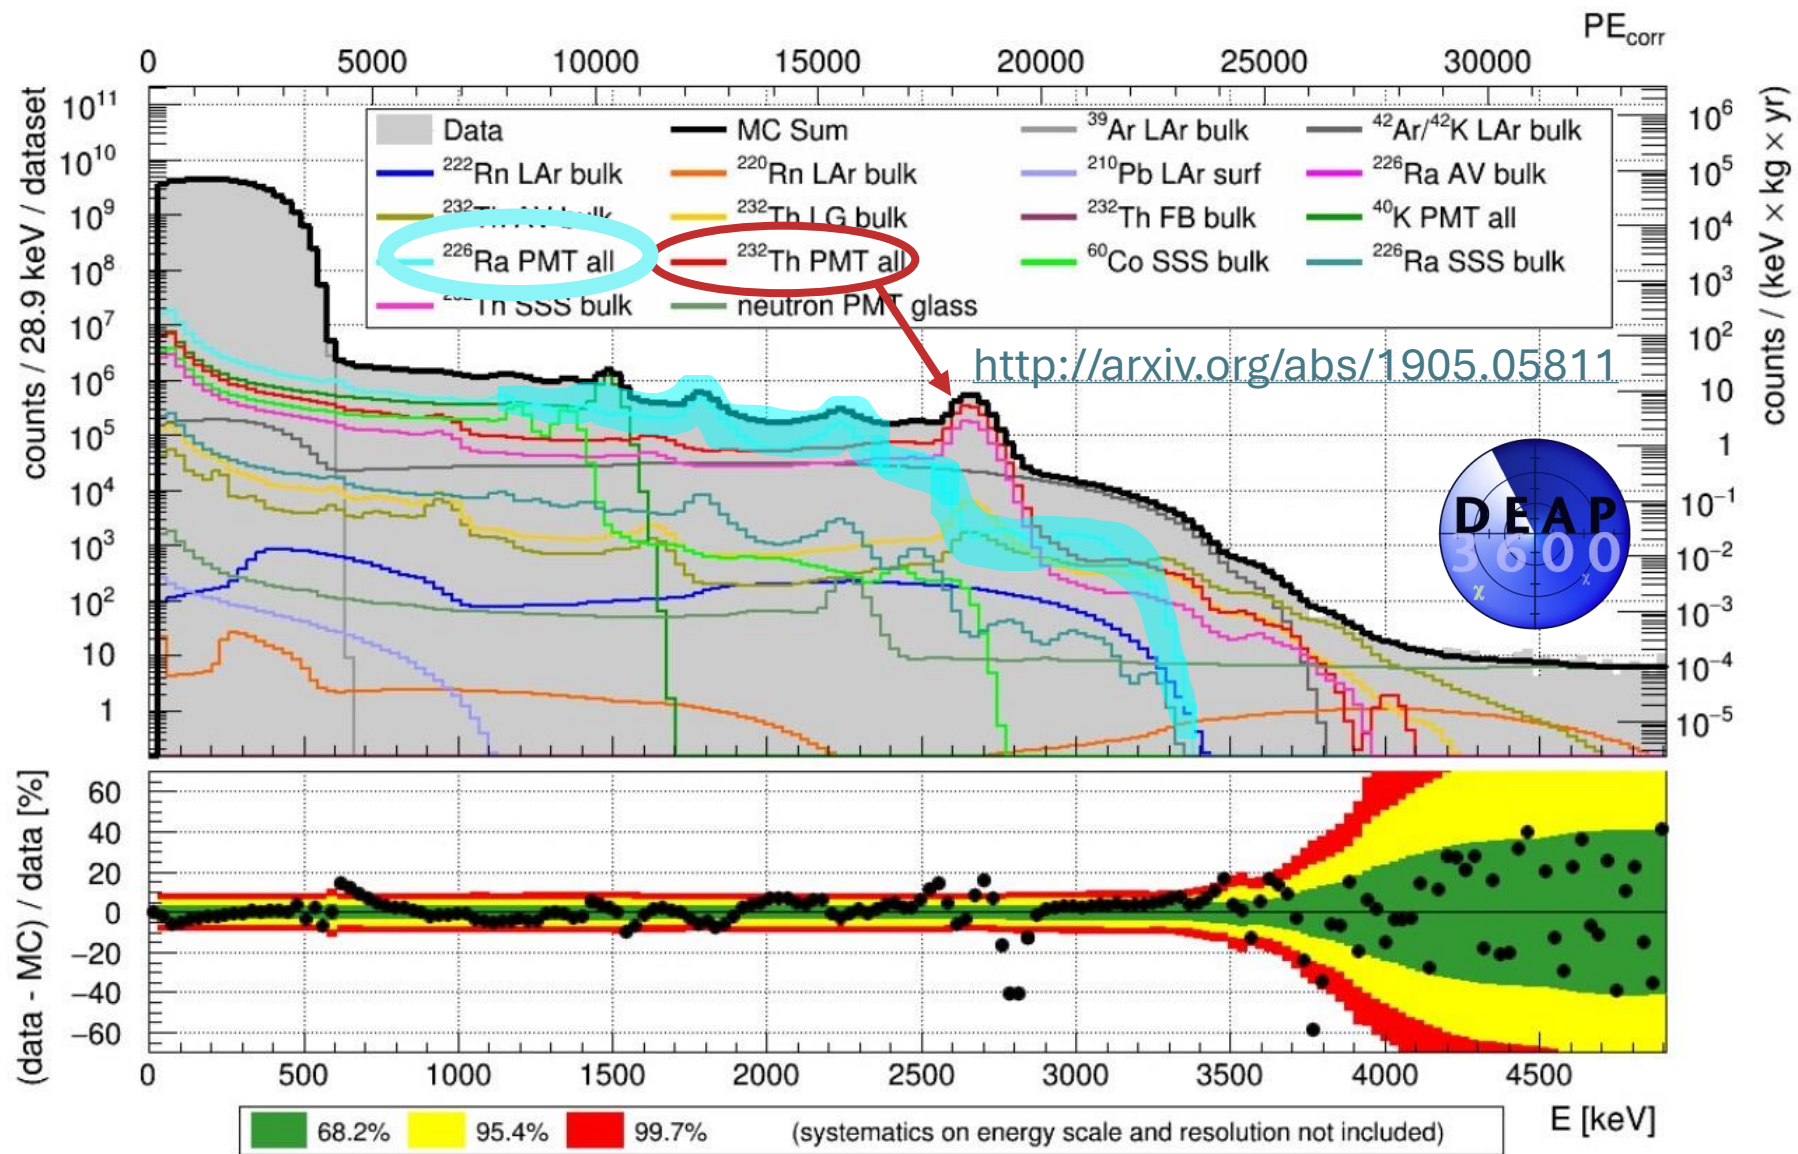





# DarkSide-20k is under construction at LNGS

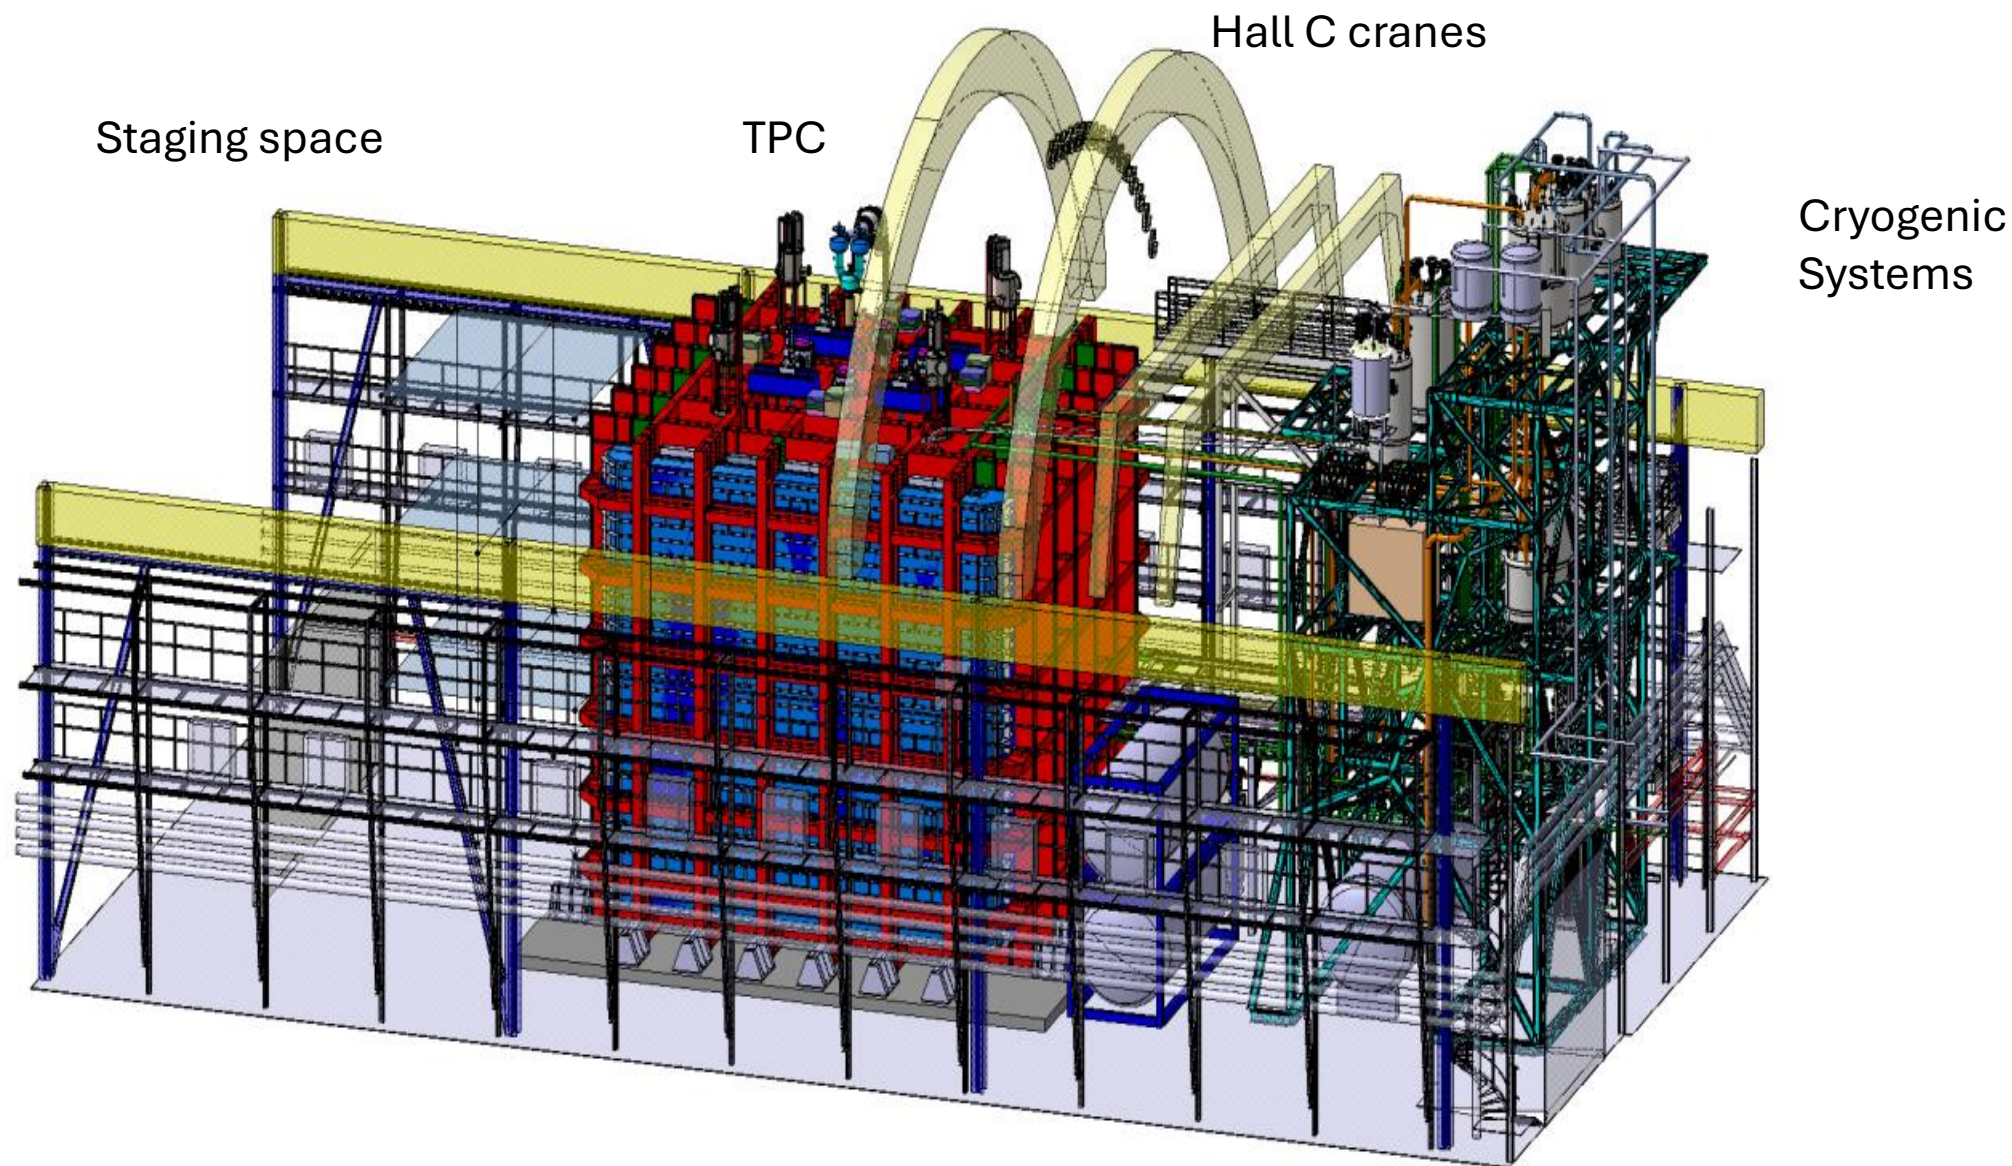







# DarkSide-20k is a two-phase Underground Argon TPC with 20t fiducial volume



... surrounded by an instrumented LAr veto

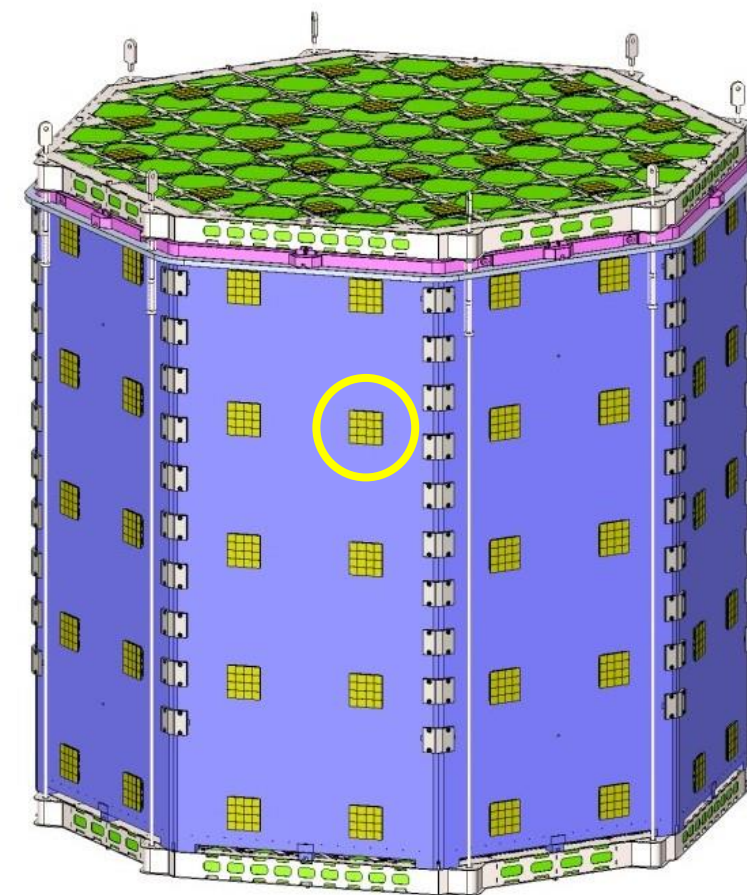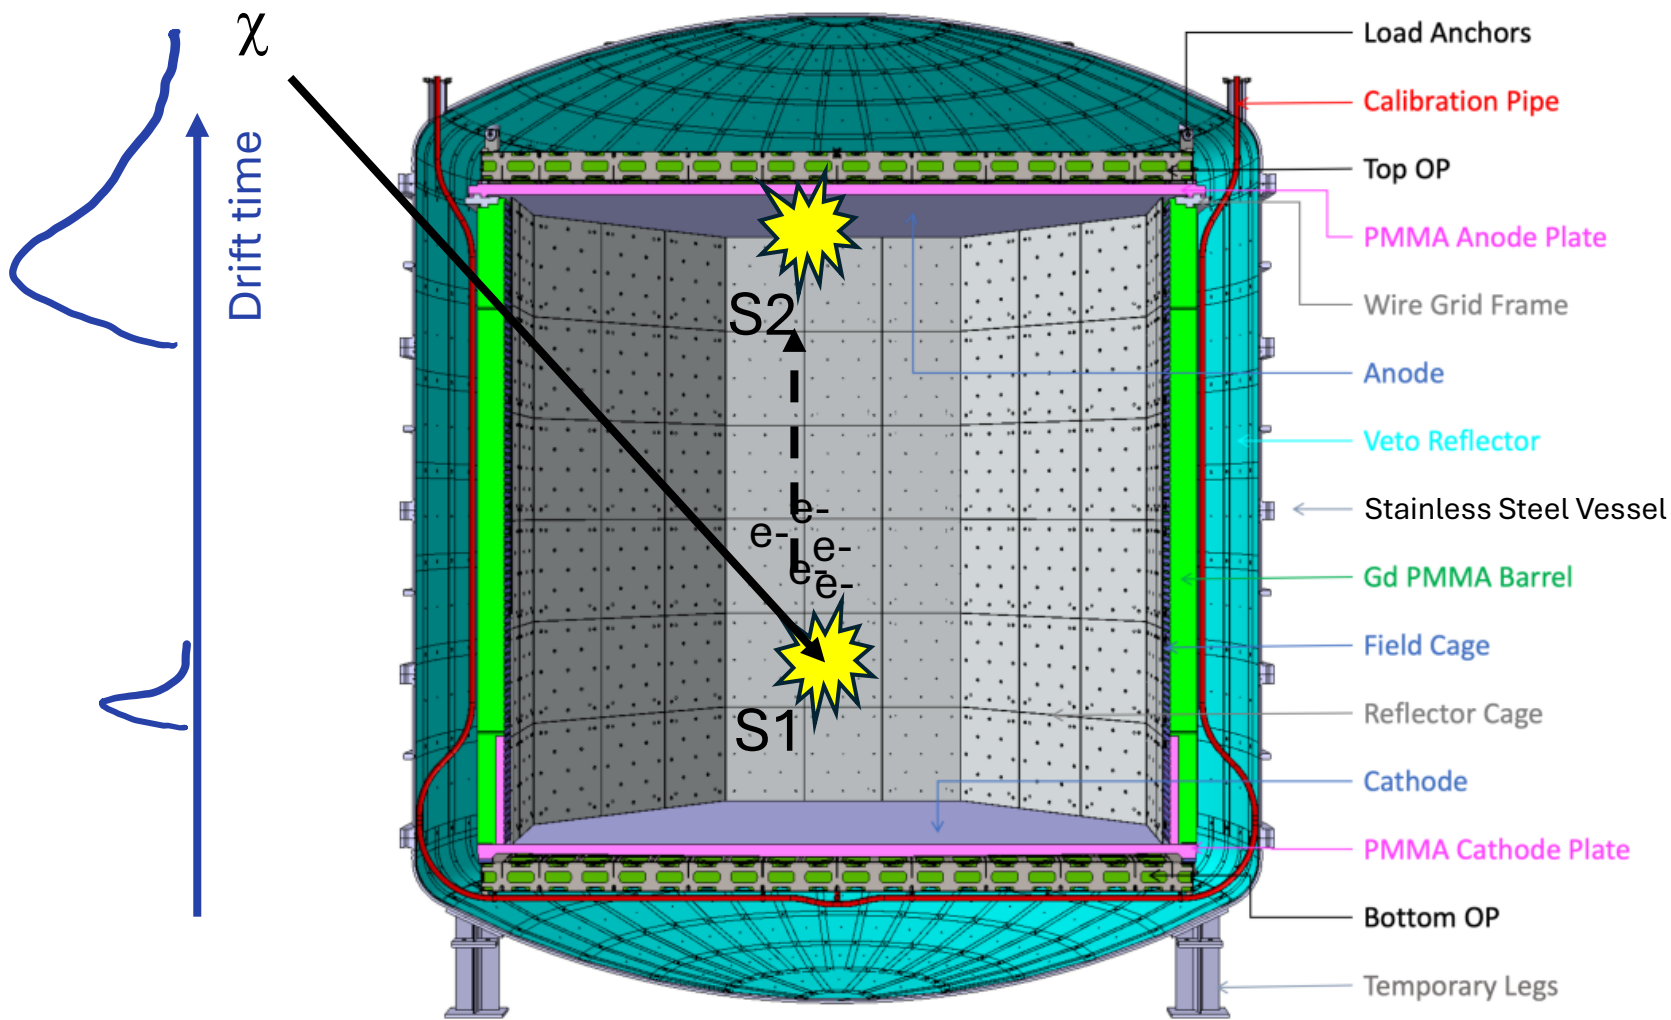

SPAD

$30 \times 30 \mu\text{m}^2$

SiPM

$8 \times 12 \text{mm}^2$

Tile (24 SiPM)





$5 \times 5 \text{cm}^2$

PDU

$20 \times 20 \text{cm}^2$

Optical Plane (264 PDUs)

$21\text{m}^2$  in TPC;  $5\text{m}^2$  in veto

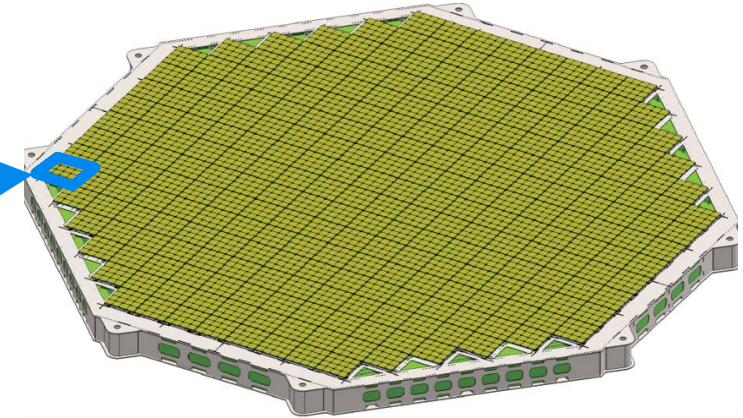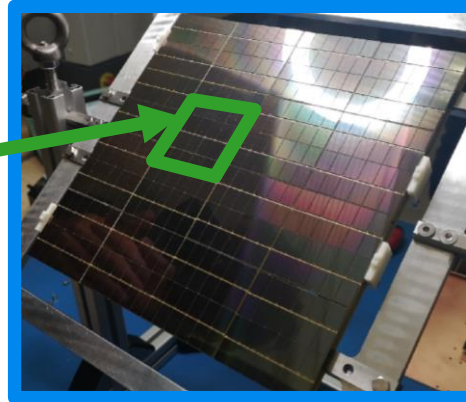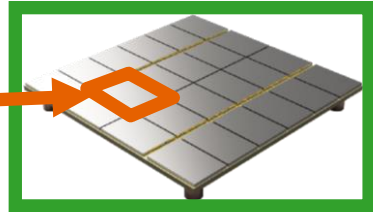

PDU packaging and assembly at Nuova Officina Assergi (NOA) at LNGS





# Low-Mass Analog SiPM Tiles are ready for deployment in DarkSide-20k



A DarkSide Tile is shown with a low-mass circuit board. Has one signal amplifier.

Silicon photomultipliers by Fondazione Bruno Kessler, model NUV-HD-CRYO meet all requirements on photodetection efficiency, low noise at liquid argon temp.



All individual components and whole assemblies pass radiopurity requirements for DarkSide-20k

Photon detection efficiency: **>40%** at 77 K


Dark count rate: **<0.01 Hz/mm<sup>2</sup>** at 77 K

SNR: **>8** for 10×10 cm<sup>2</sup> TPC PDU)

<https://doi.org/10.1088/1748-0221/12/09/P09030>

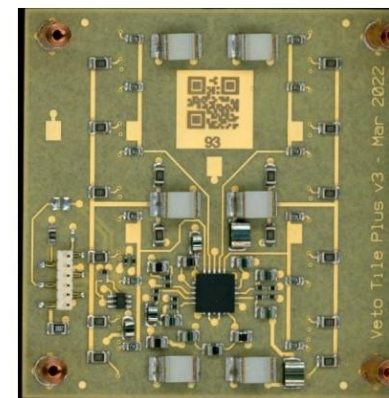
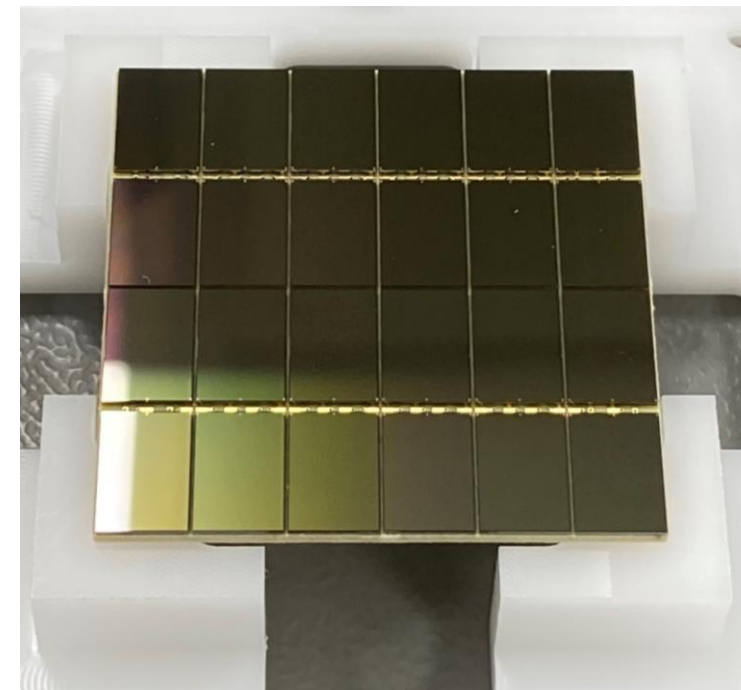


vTile backside

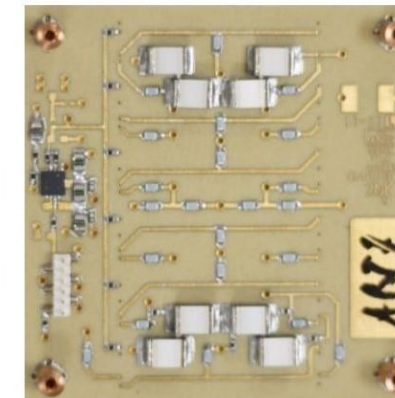


TPC Tile backside



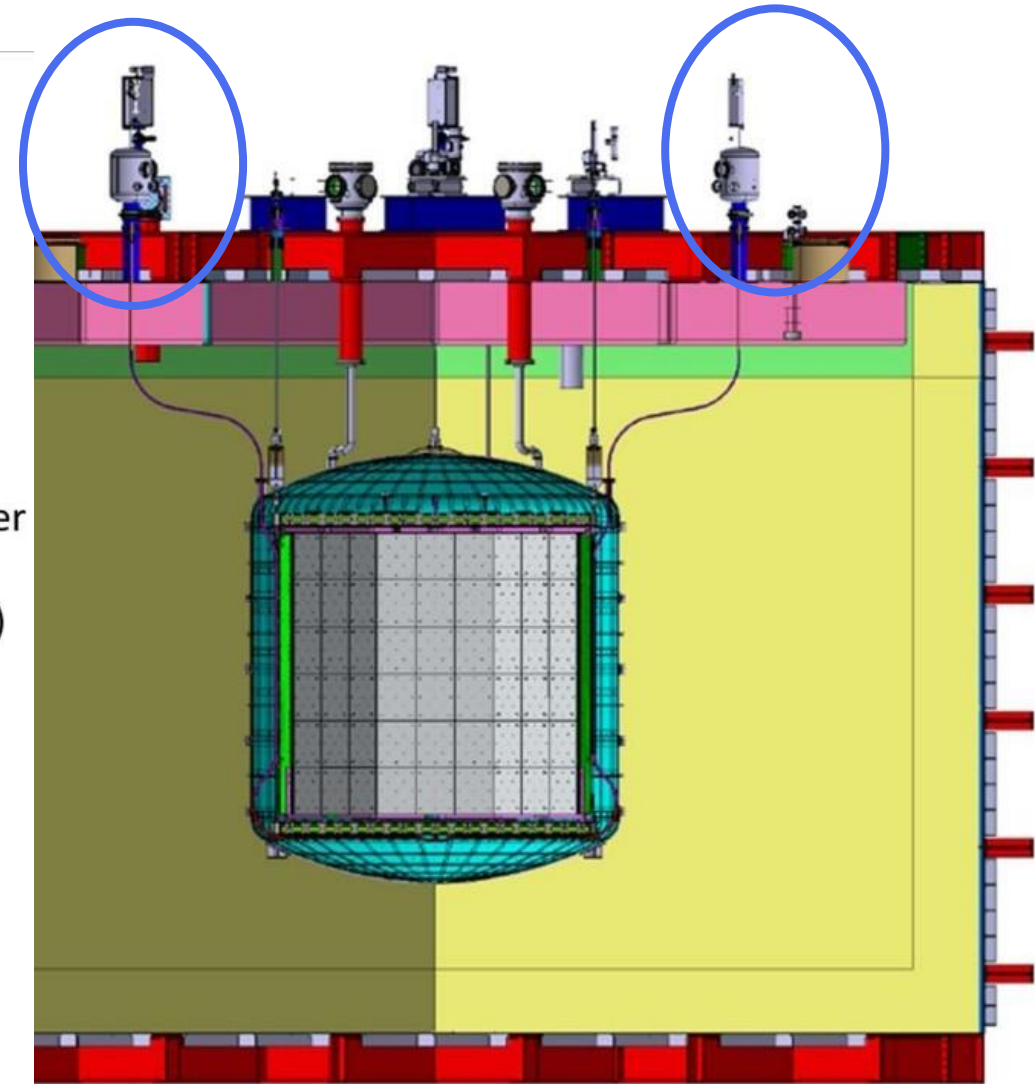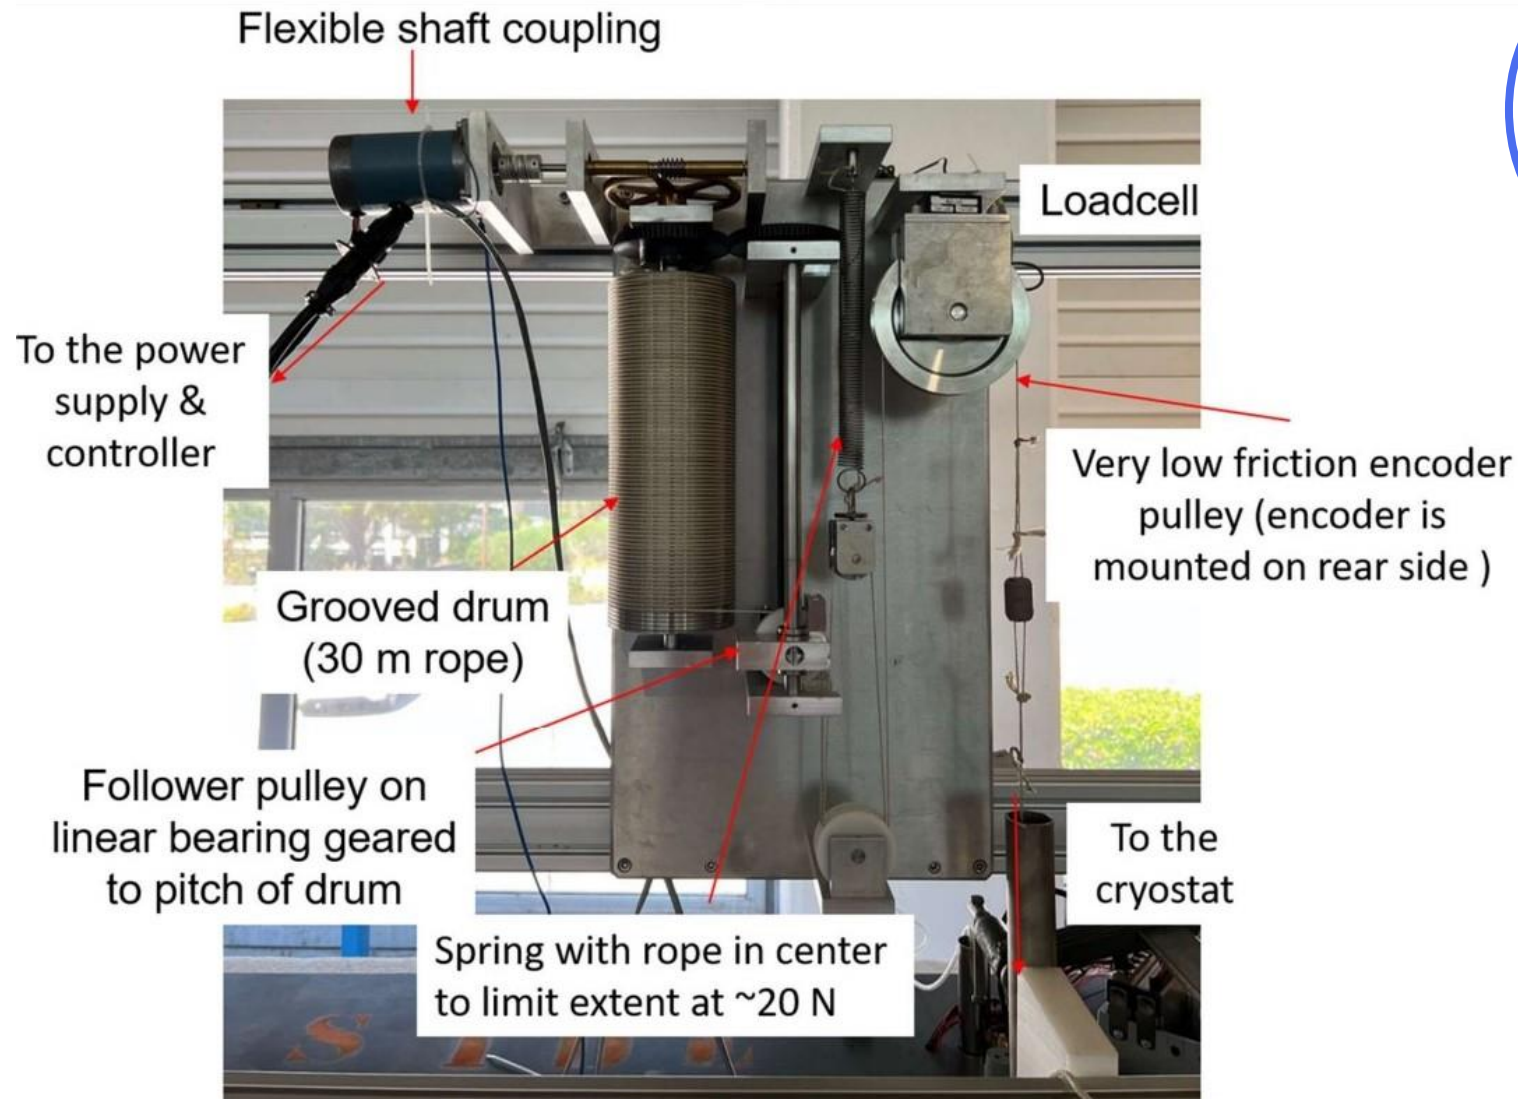

Control code expanded to work in mode of keeping two ends of a rope in tension. Friction modeled. (Source deployed in tube highlighted yellow.)

Cryo-tests passed.

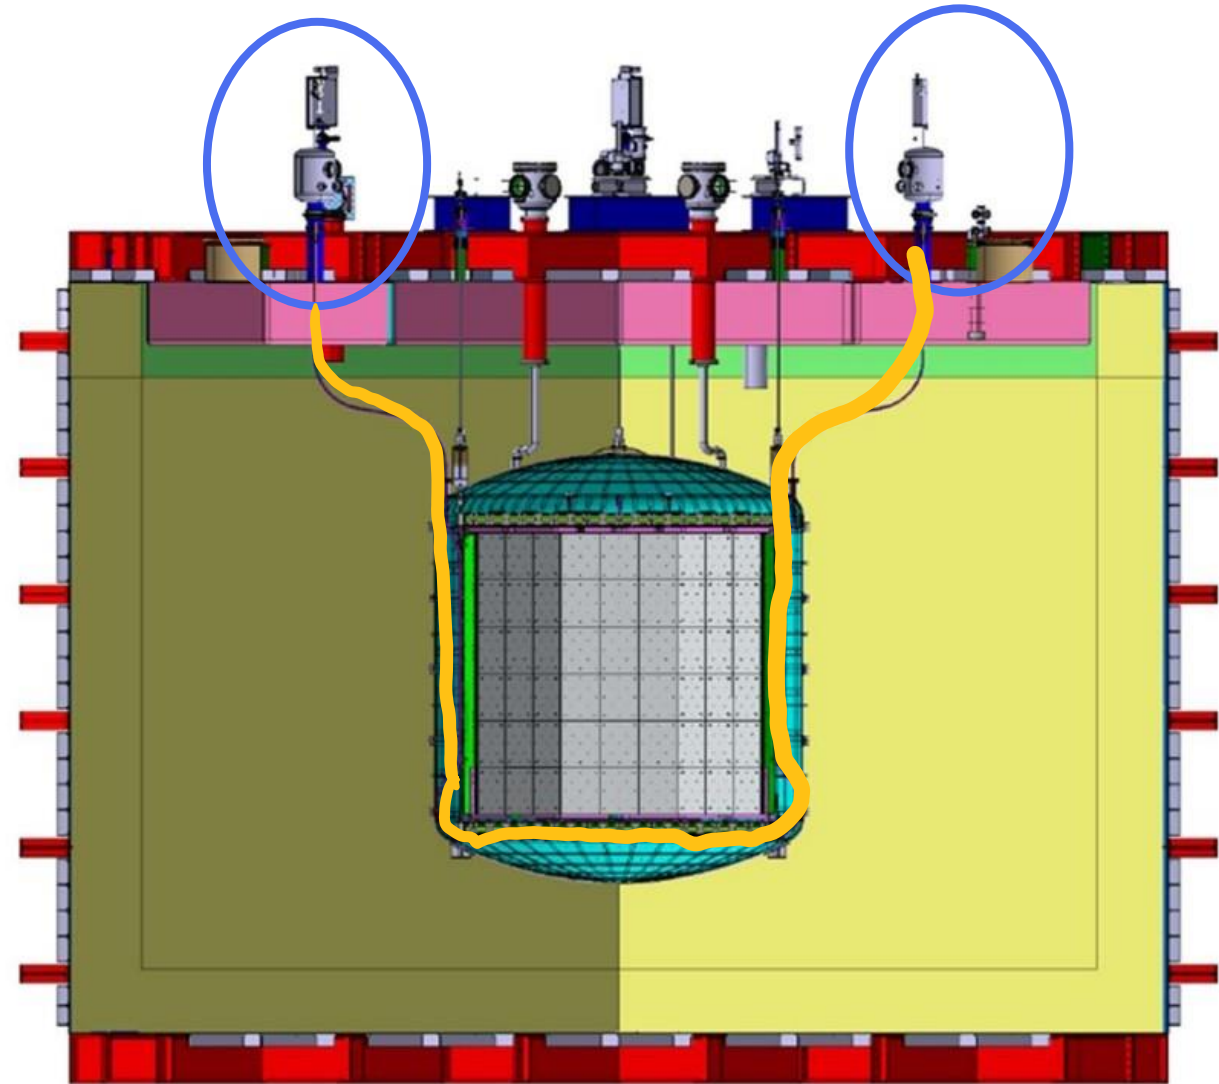




# Projected Sensitivity of DarkSide-20k



Expect 3 events in 200 ton x year from neutrino coherent scattering

Underground Argon target, excellent PSD, and neutron veto allow zero instrumental background

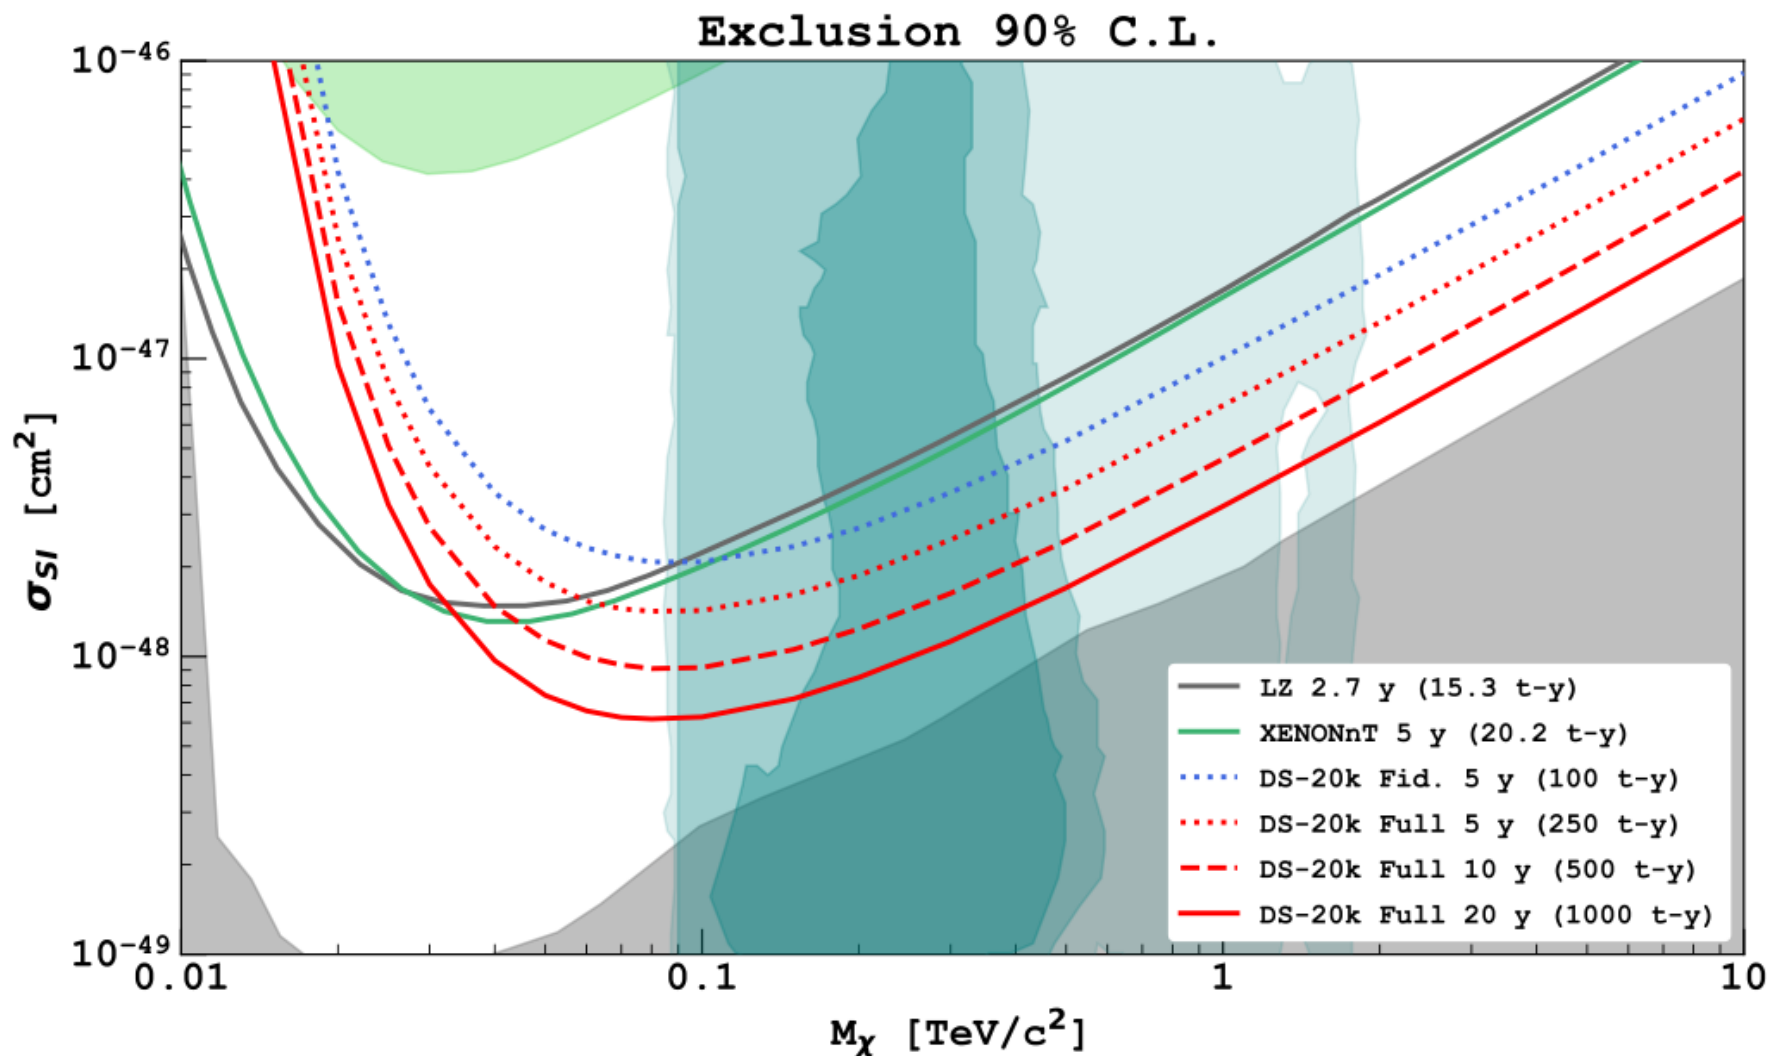






# Projected Sensitivity of DarkSide-20k



Expect 3 events in 200 ton x year from neutrino coherent scattering

Underground Argon target, excellent PSD, and neutron veto allow zero instrumental background

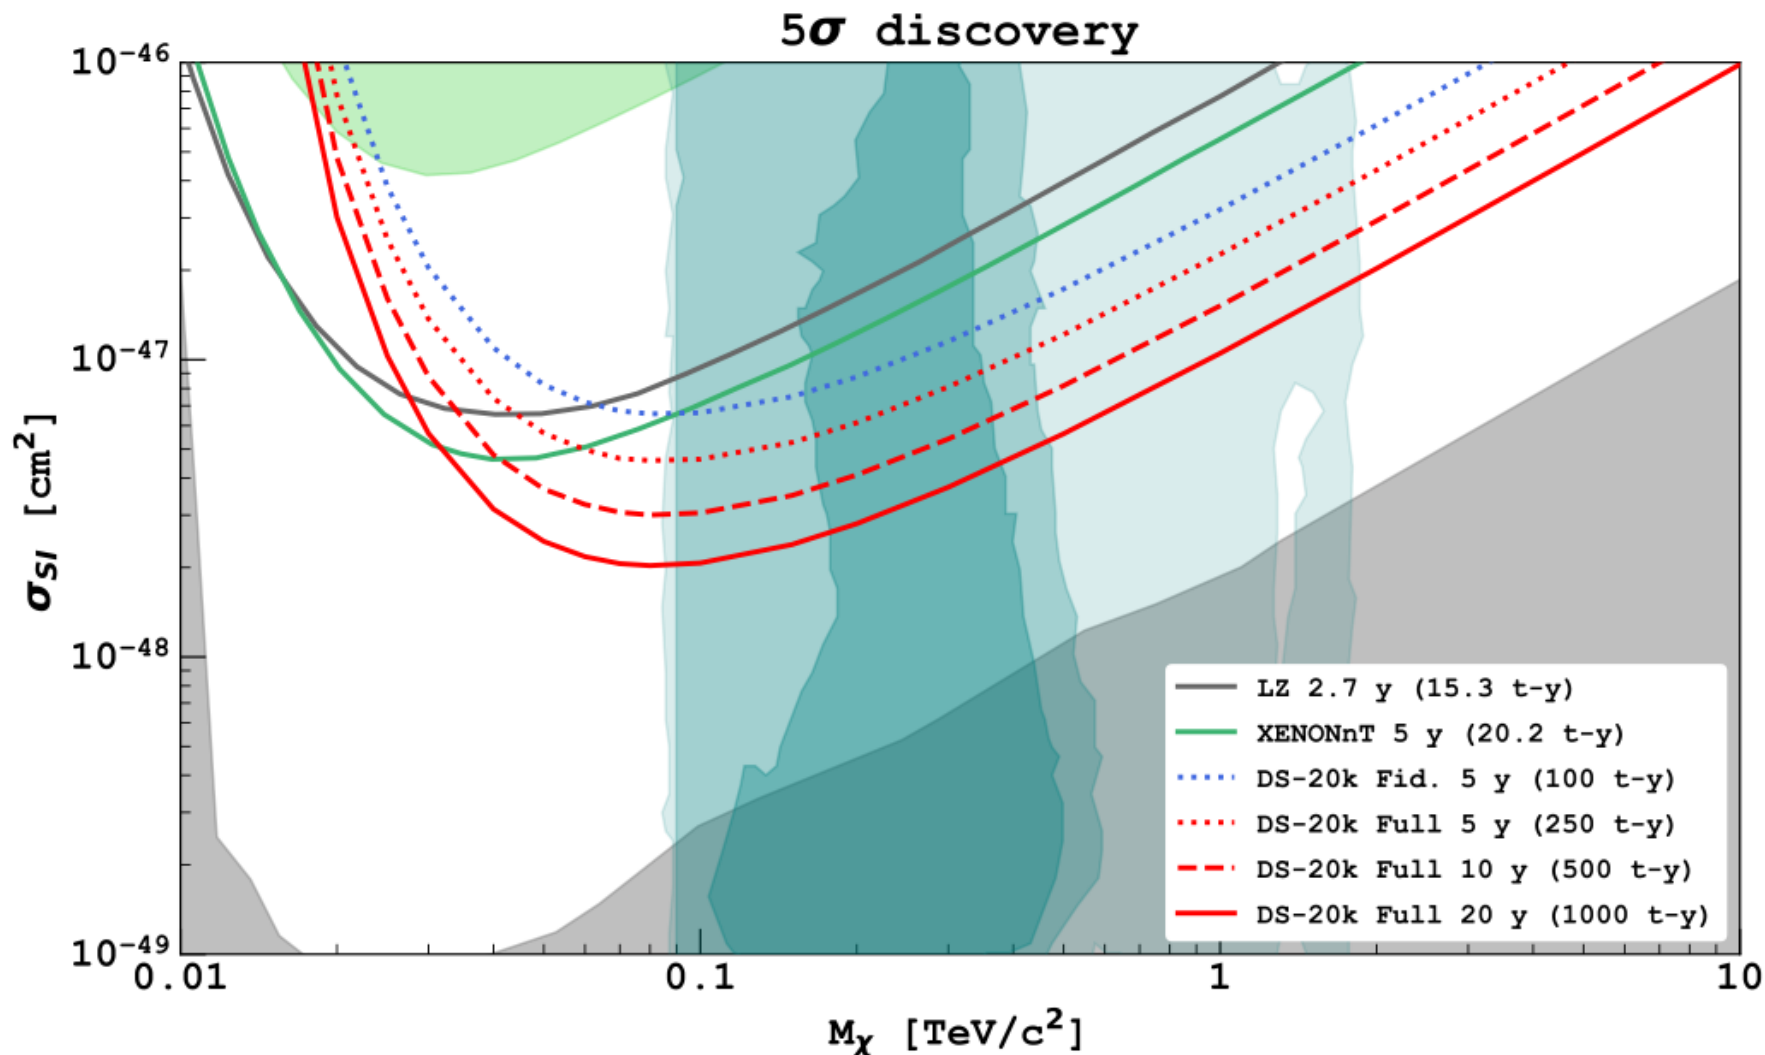




# Overview



- The Past and Present
  - DEAP-3600
- Needs of larger detectors
  - Underground argon – low in  $^{39}\text{Ar}$
  - Better control of surface backgrounds – coatings
  - Lower radioactivity light collection – from PMTs to SiPMs
- DarkSide-20k
- **ARGO**
- Getting there – the Canadian group's medium-term plans



# ARGO: a multi-hundred tonne detector

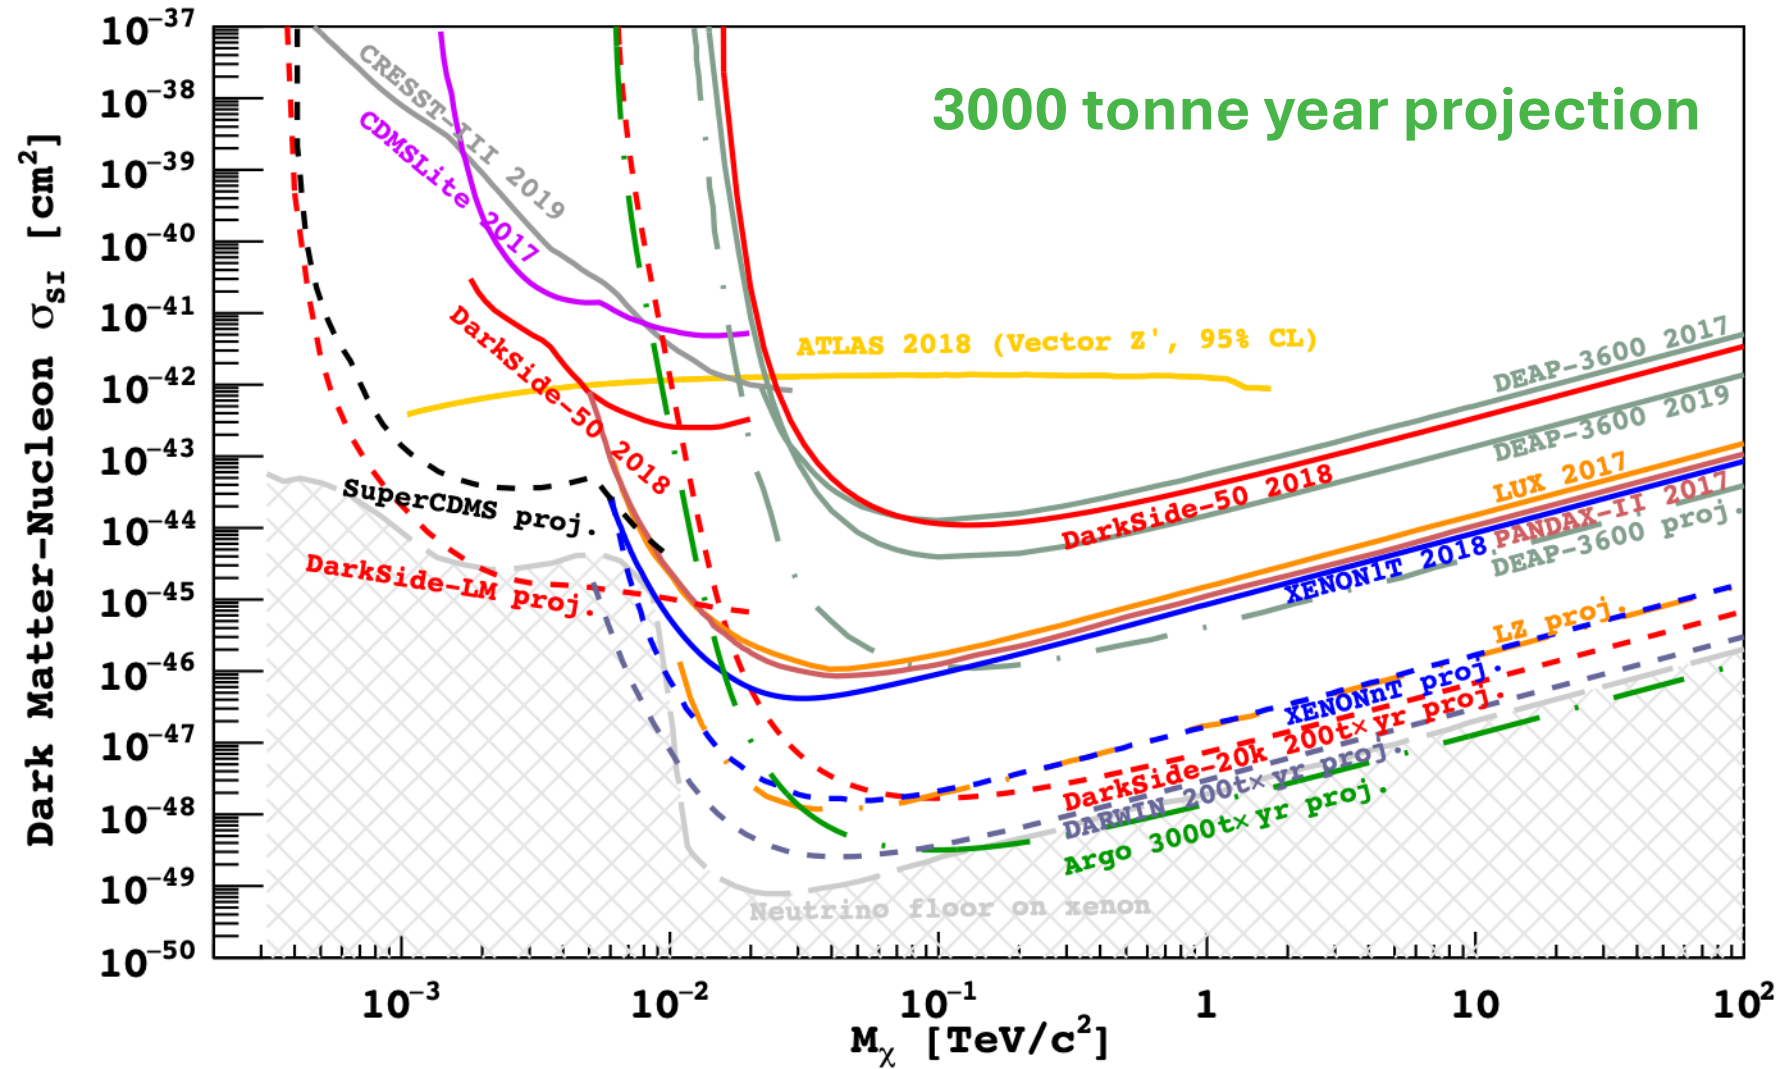





# A Large Two-Phase TPC and a Single-Phase Detector are Being Considered

- The first choice of site is SNOLAB
- The second choice of site is SURF

The D.O.E. in its DOE Perspectives on the P5 Report as part of the HEPAP process, stated support for proposals

DOE response and actions : <https://science.osti.gov/hep/hepap/Meetings/202405>

- At the present time, based on the Snowmass Community Summer Study, there have been two proposals for G3 Dark Matter detectors : XLZD and ARGO
- Each concept has explored potential sites both within the US and off-shore.
- At the present time, DOE is supportive of the development of the off-shore concepts.
- DOE will entertain proposals by U.S. groups for pre-project R&D consistent with experiment deployment at an off-shore site.


## UAr Mass:

- total 400 tonnes;
- fiducial 300 tonnes.

SiPMs assemblies arranged as photon-to-digital converters (PDCs).

## Data rates:

- operation 5k p.e./( $m^2 \times s$ );
- calibration 100k p.e./( $m^2 \times s$ ).

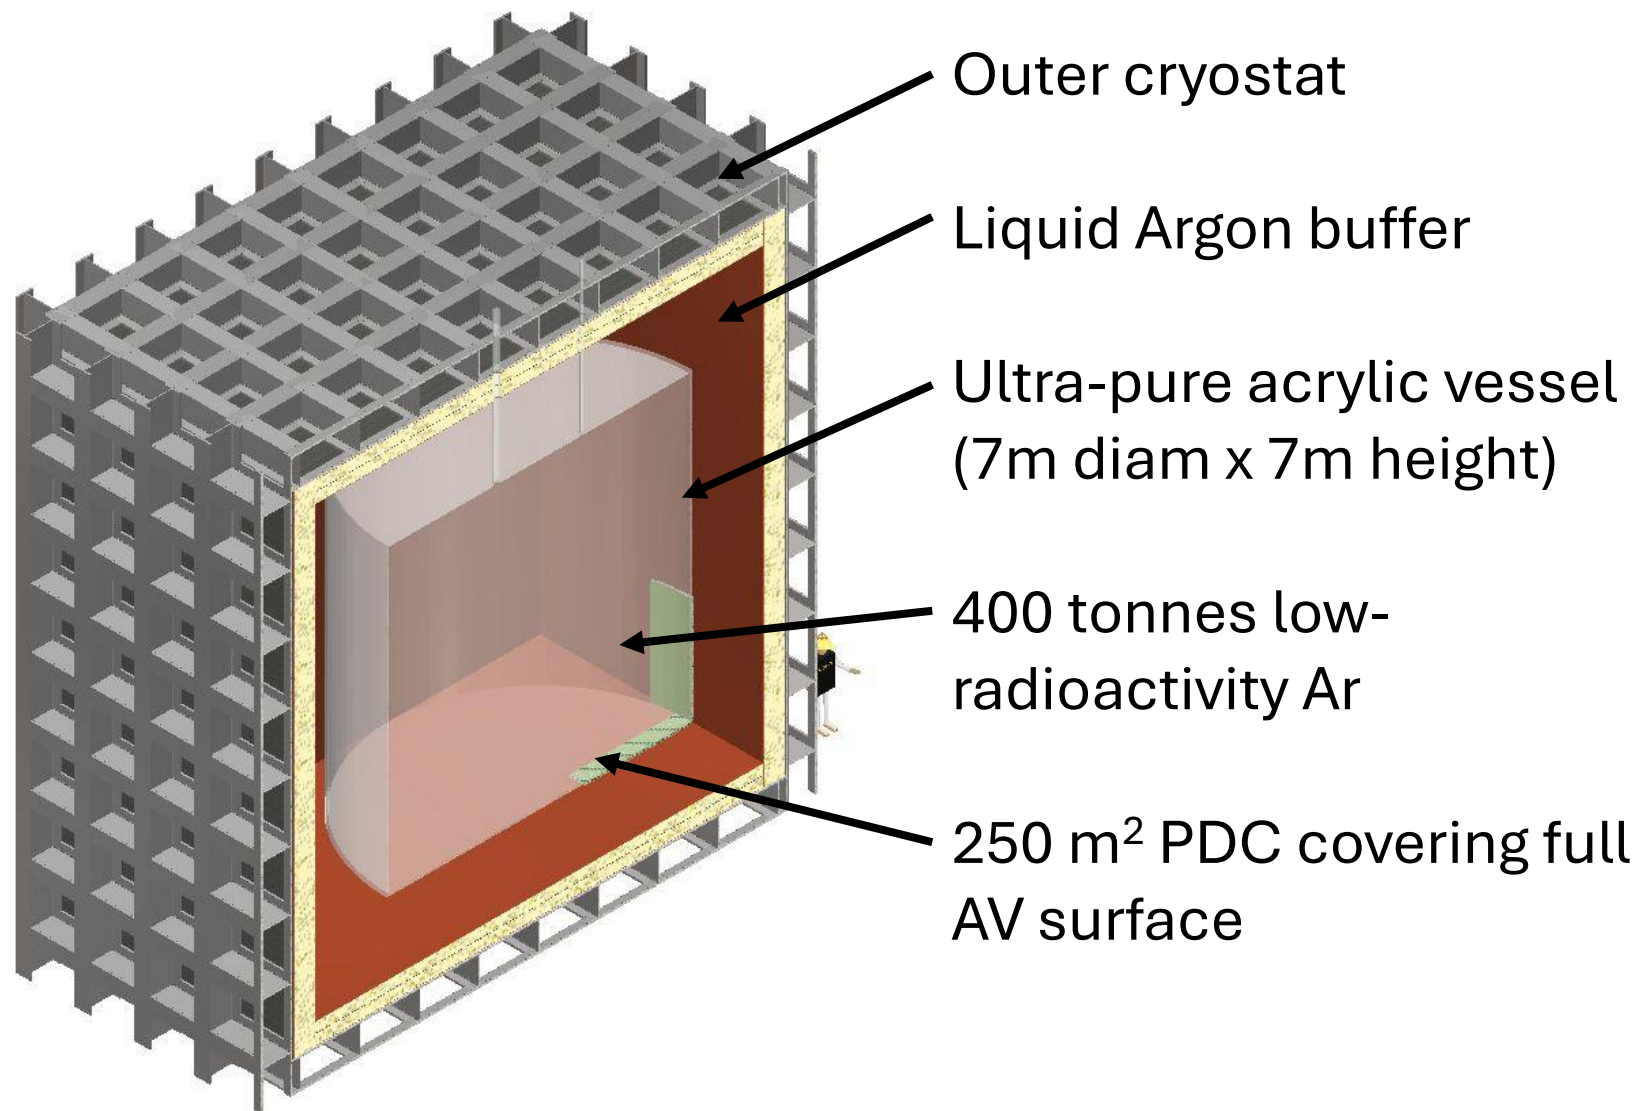



# Overview



- The Past and Present
  - DEAP-3600
- Needs of larger detectors
  - Underground argon – low in  $^{39}\text{Ar}$
  - Better control of surface backgrounds – coatings
  - Lower radioactivity light collection – from PMTs to SiPMs
- DarkSide-20k
- ARGO
- Getting there – the Canadian group's medium-term plans





# Preparing for ARGO – Canadian Context



- The Canadians in the GADMC are based at TRIUMF, The University of Alberta, SNOLAB, Laurentian University, Queen’s University at Kingston, Carleton University, and the Université de Sherbrooke.
- We are working on a single-phase design and have laid out several tasks.
  - Development of Photon-to-Digital converters
  - Development of an AI-based DAQ to tease signal from noise and keep data rates manageable
  - Background estimation and creation of a background budget
  - Development of surface coatings to suppress backgrounds
  - Engineering of the detector and estimation of utility needs
  - Development of the ARgon UnderGround Storage (ARGUS)

Low power


Electronics immediately behind the SPAD arrays

Digital output over fibre

Ability to control individual SPADs



Led by U Sherbrooke

This work as received CFI IF support in 2017, 2020, and 2023

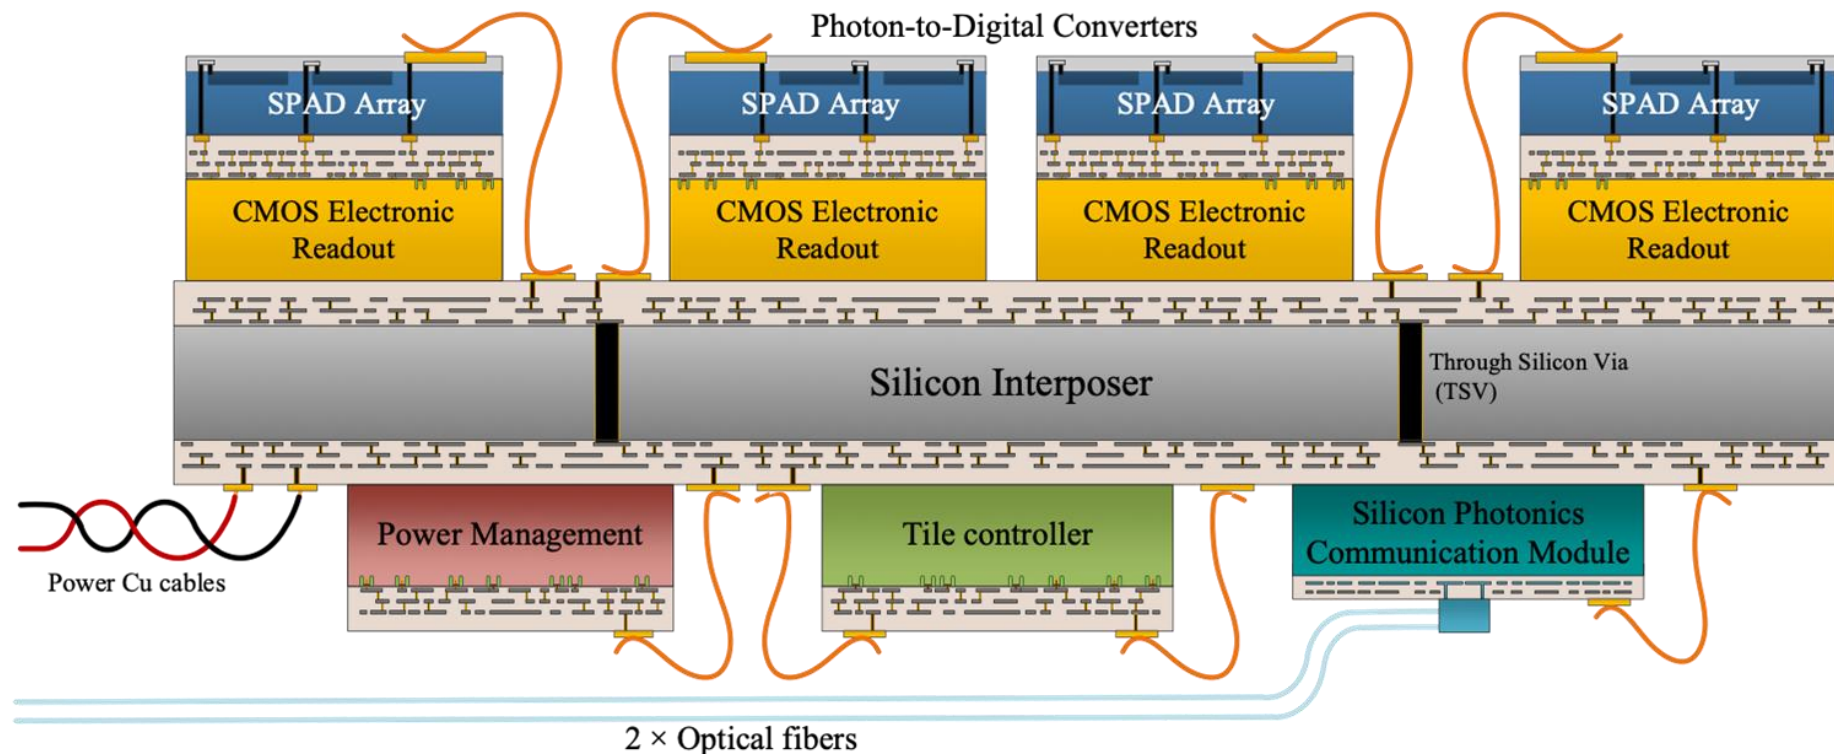

- Audrey Corbeil Therrien (Canada Research Chair) in Electrical Engineering at U. Sherbrooke brings this expertise to the group and is co-leader of the Canadian group.
- Data rates are high: 1.2 M pe/s in normal physics data taking.
- Need an efficient and smart DAQ system.



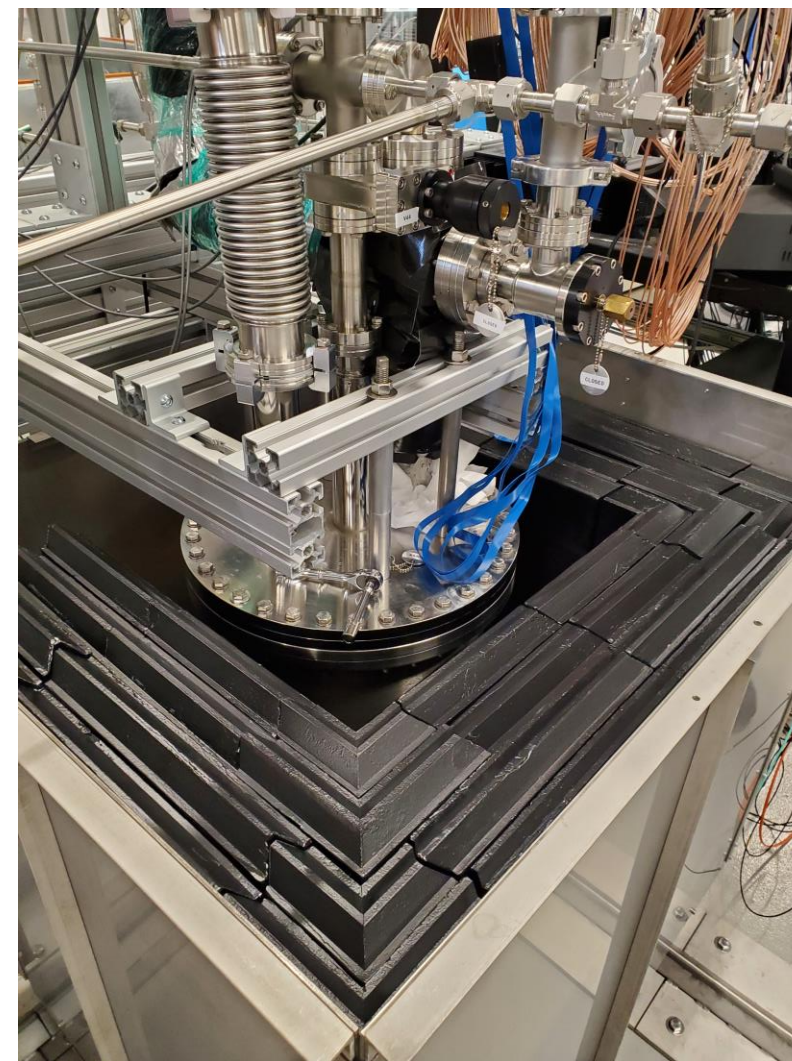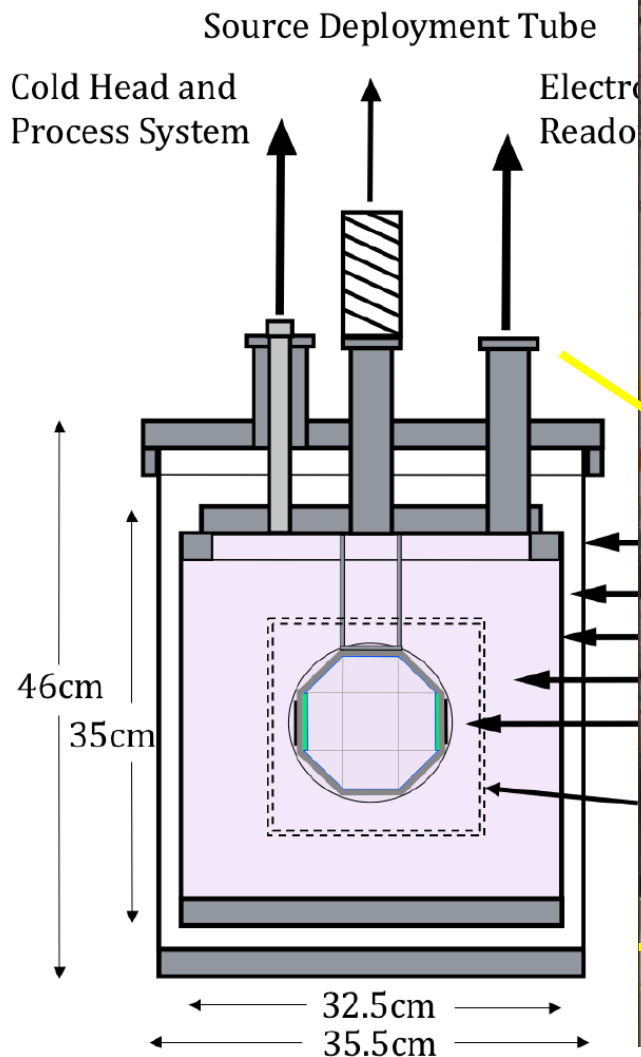



# Argon-1 Measurements



- Studies of alpha scintillation quenching in liquid argon via deployment of alpha sources directly into the detector (cold source deployments and data taking recently completed, analysis ongoing)
- Pulseshape discrimination capabilities of SiPMs for future liquid argon based detectors using tagged gamma source (this summer)
- Further measurements of effects of  $Rn^{222} / Rn^{220}$  and their progeny on detector components
- Response of Pyrene-doped Polystyrene coatings to alpha scintillation.



# Proto-typing the Future



- The Canadian group is proposing a prototyping station to be built at SNOLAB using existing services for DEAP-3600 (ie cooling, power, Ar purification, compressed air).
  - Everything above the Cube Hall deck stays!
- We foresee two detectors in ~identical cryostats
  - A two-phase TPC
  - A single-phase detector into which different components can be inserted.
- Each would have approximately 1 tonne of Argon.
- They could be deployed (one at a time) into the existing DEAP shielding tank in the Cube Hall after the next DEAP data run is complete.





# Proto-typing the Future: Measurements to make




- Testing large area Photon to Digital Converters including high time-resolution measurements of PDC external cross talk.
- Large area surface alpha measurements with background will be below those of an XIA.
- Large area measurements of the behaviour of surface coatings: scintillation timing and light yield.
- Measurement of  $[A(\text{Ar-42})]$ ?
- Possible dark matter measurements.



# Siting the Future: ARGO Fits in the SNOLAB Cube Hall



- We are proposing to develop a detailed siting plan for ARGO at SNOLAB.
- We are requesting SNOLAB engineering resources to help.
- Building on the work of DarkSide-20k, we will develop a model of utilities required.

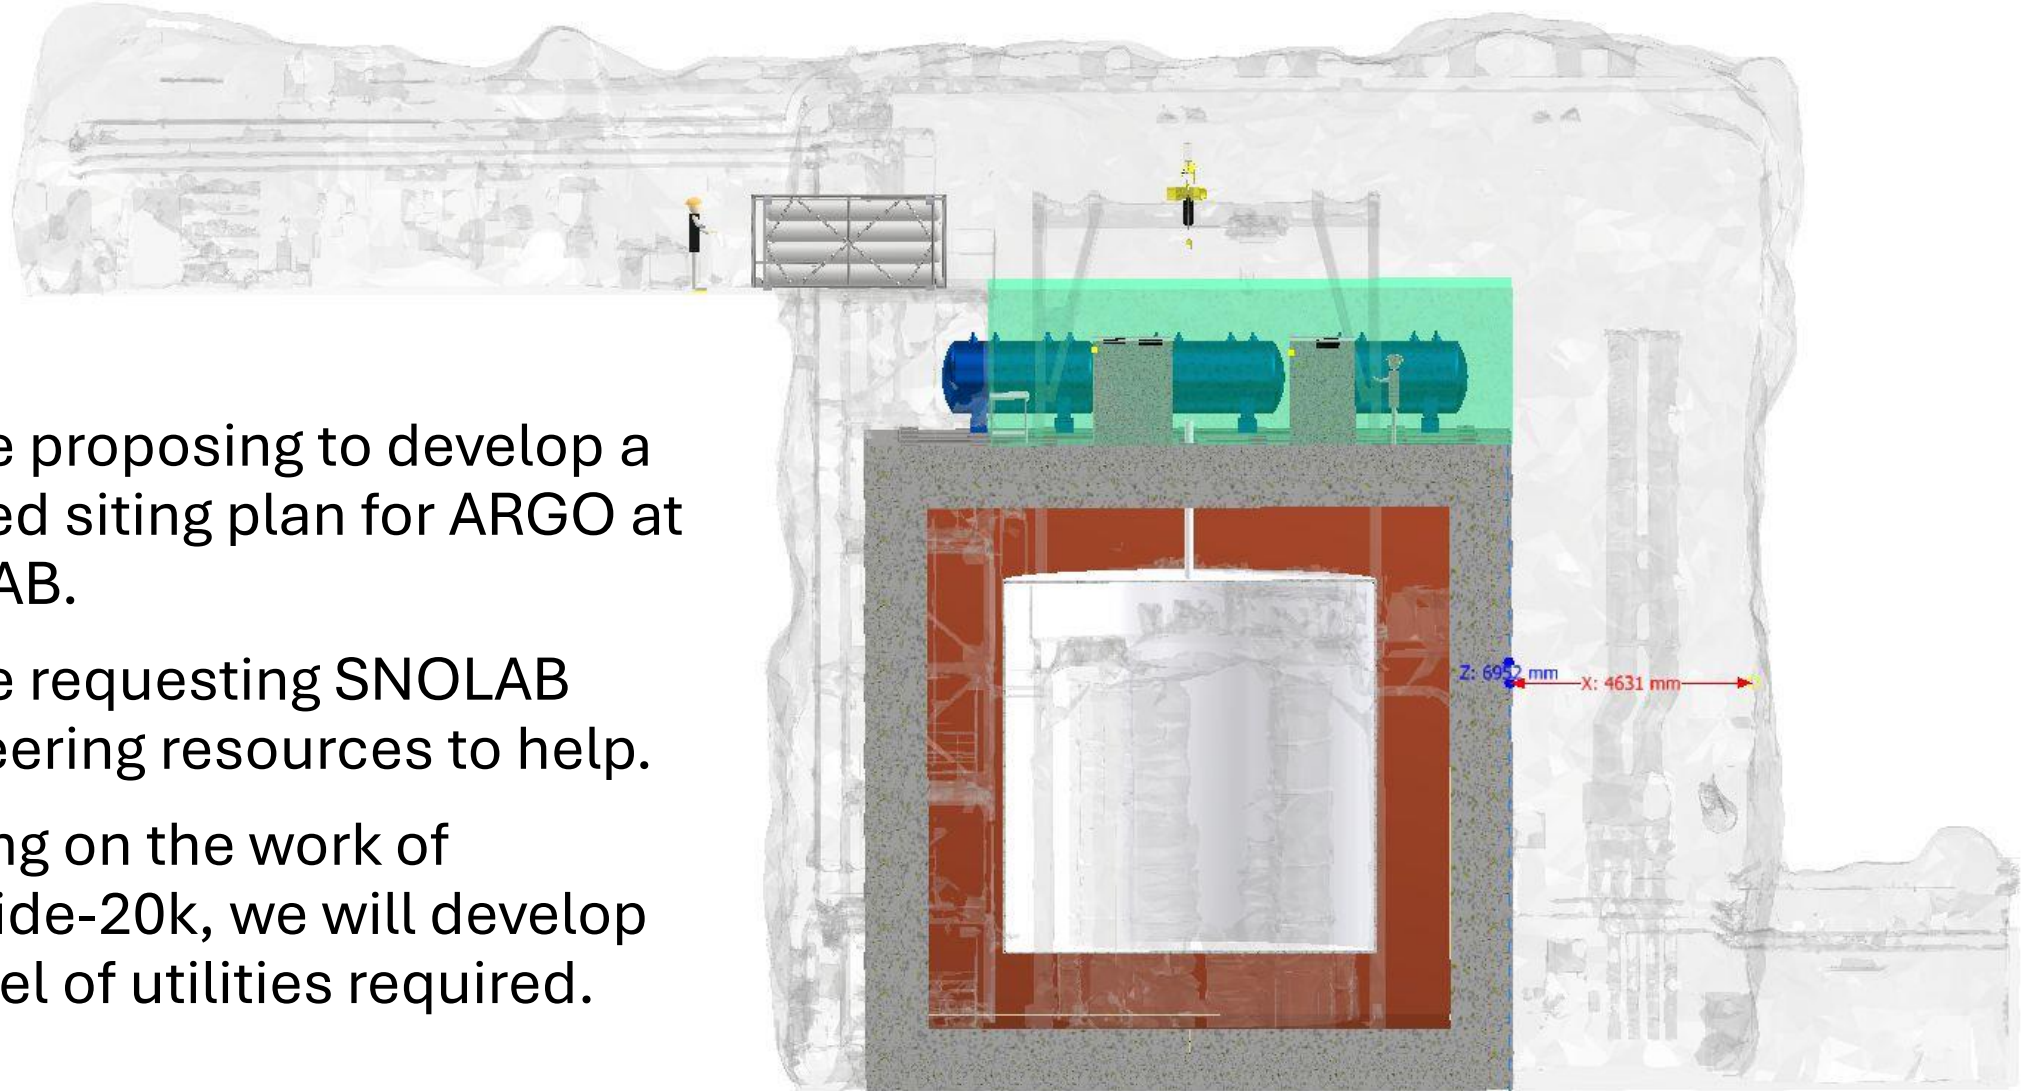



# Funding the Future



- The Universities have agreed to support our CFI-IF25 application.
- Our Expression of Interest to SNOLAB is in advanced preparation for approval at the summer 2024 EAC meeting.





# Summary



- Liquid Argon is a powerful technology for discovery of WIMPs masses above  $\sim 50 \text{ GeV}/c^2$  and between about  $\sim 1$  and  $10 \text{ GeV}$  well into the neutrino fog.
- The Global Argon Dark Matter Collaboration has a phased approach to probe this critically important part of parameter space.
- Completing the DEAP-3600 run plan and then transitioning to DarkSide-20k will allow us to verify detailed alpha background models and then have world-leading sensitivity to WIMP dark matter.
- Many interesting exotic phenomena are studied well with liquid argon
- A multi-hundred tonne liquid argon detector, ARGO, proposed for SNOLAB, will allow us to be sensitive well into the neutrino floor.
- Canadian groups are involved in all phases of this project.



END







# Support Slides





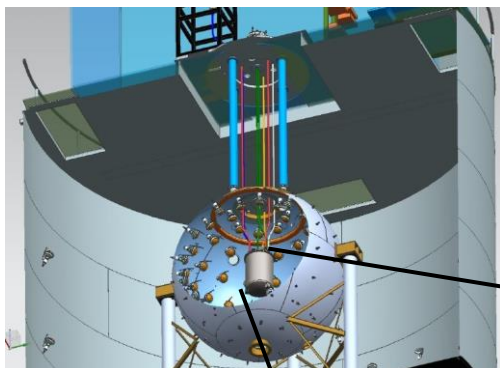


<https://www.arxiv.org/abs/1410.0653>

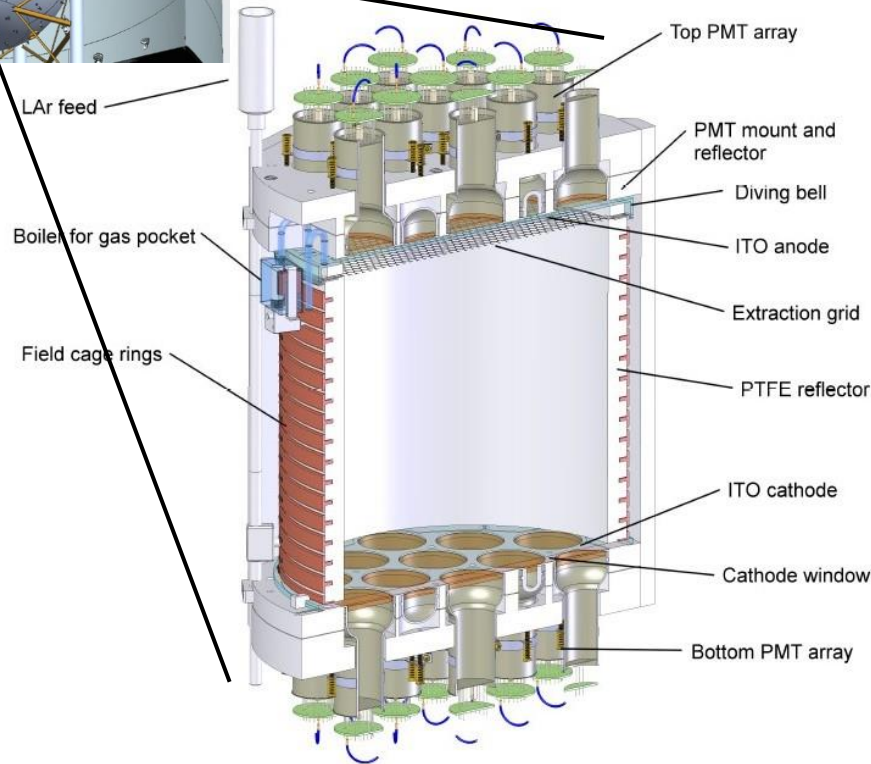

- Excellent fit to a detailed EM background model.
- Underground Ar depleted in Ar-39 w.r.t. surface Ar by a factor of at least 1400.

<https://arxiv.org/abs/1510.00702>

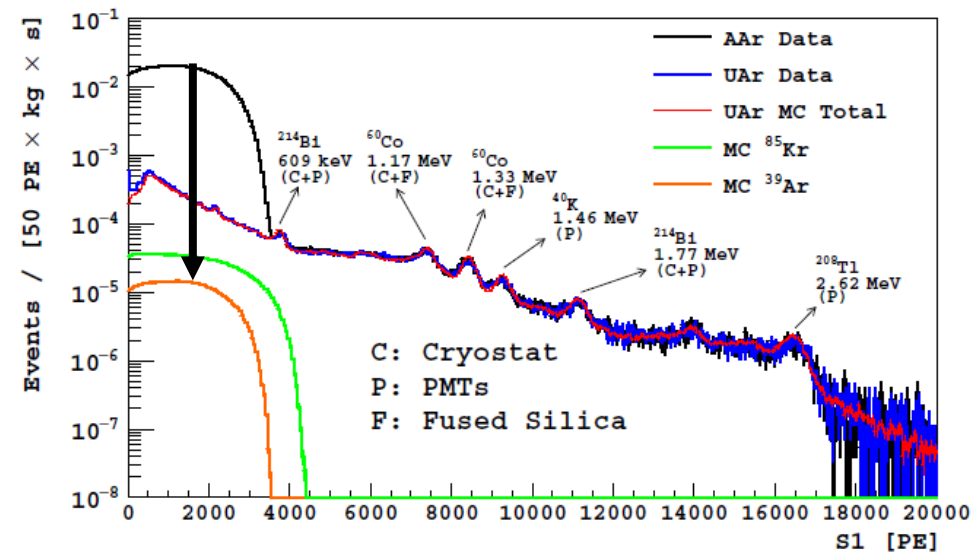

Energy estimator →




# The DarkSide-50 532-day run had no events in the ROI and set stringent limits on WIMP-nucleon couplings




<https://arxiv.org/abs/1802.07198>

Nuclear Recoil Acceptance

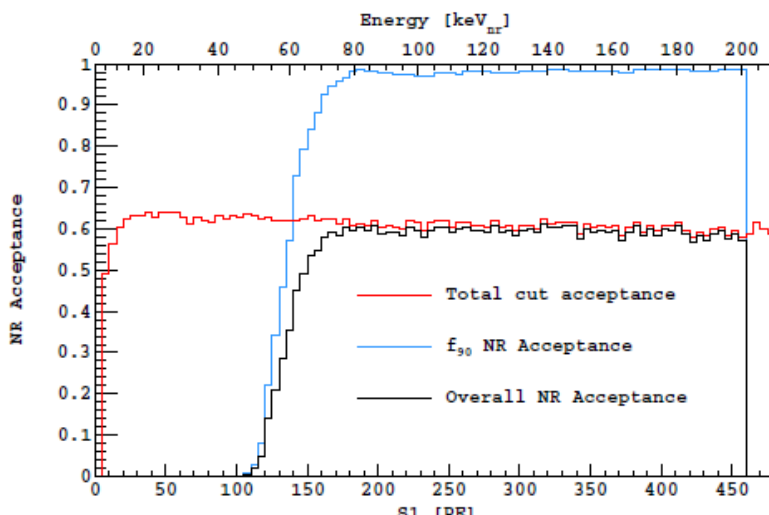

High acceptance after cuts

Pulse shape parameter  $f_{90}$

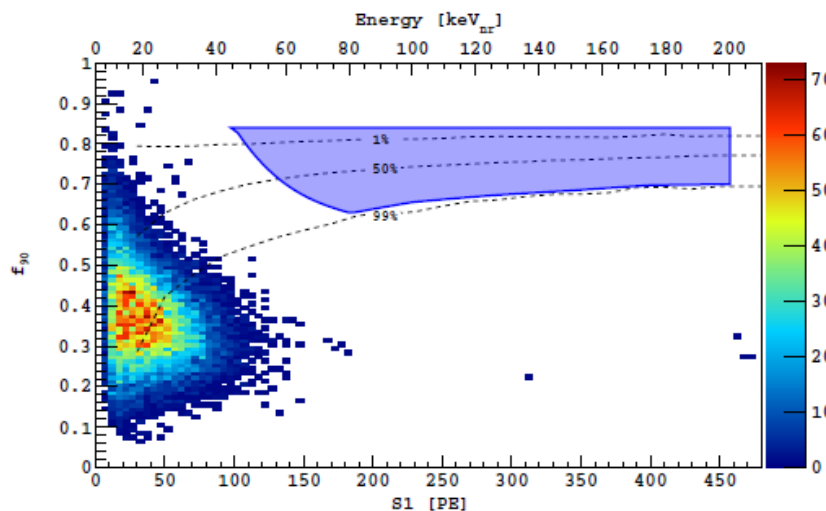

No events near ROI after cuts (including FV)

0 Energy 200 keV NR

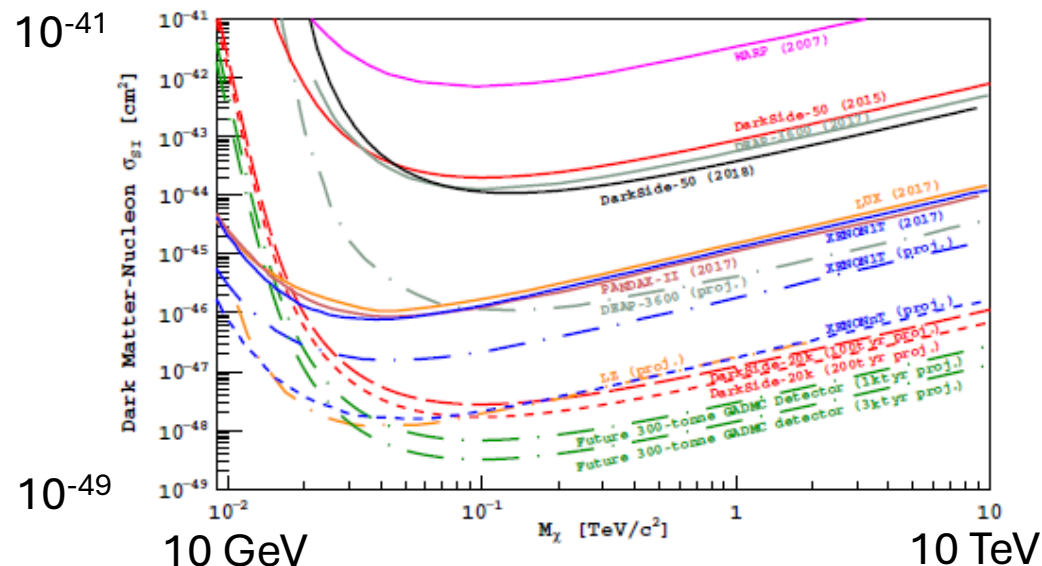


FIG. 10. Spin-independent DM-nucleon cross section 90% C.L. exclusion limits from the analysis detailed in this paper (in black), compared with selected results and projections.

Limit set by DarkSide-50k:


$$1.1 \times 10^{-44} \text{ cm}^2 \text{ at } 100 \text{ GeV}/c^2$$



# Liquid Argon is an excellent choice for a low mass WIMP search




DarkSide-50 set strong limits between 1.8 and 10 GeV

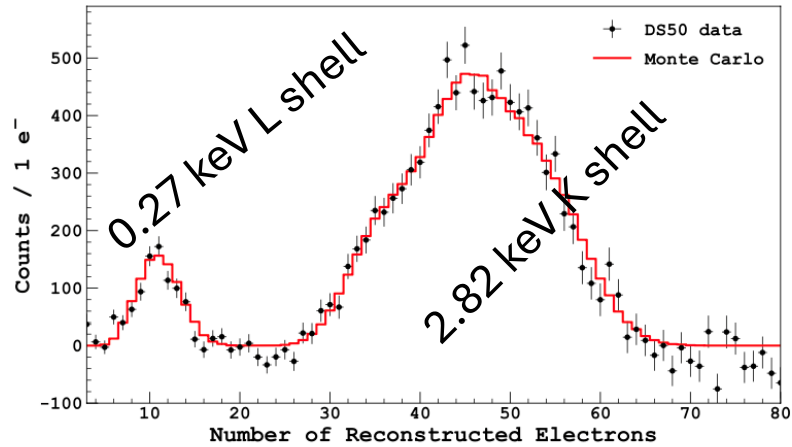


X-rays after  $^{37}\text{Ar}$  decay

<https://arxiv.org/abs/2107.08087>

A series of studies was carried out for a detector with 1.5 tonnes UAR optimized for low-mass WIMPS.

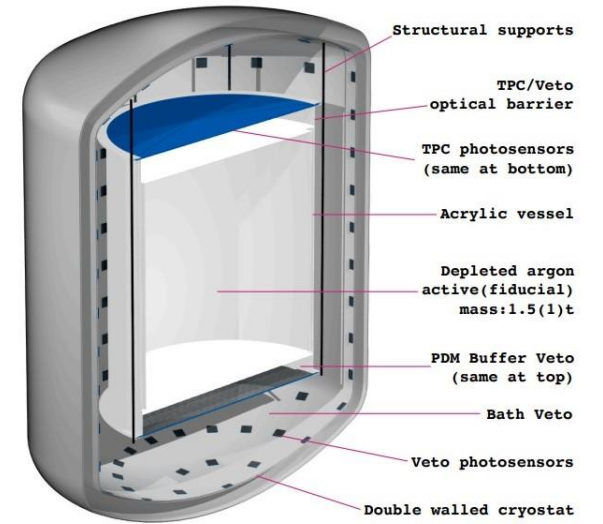

<https://arxiv.org/abs/2209.01177>

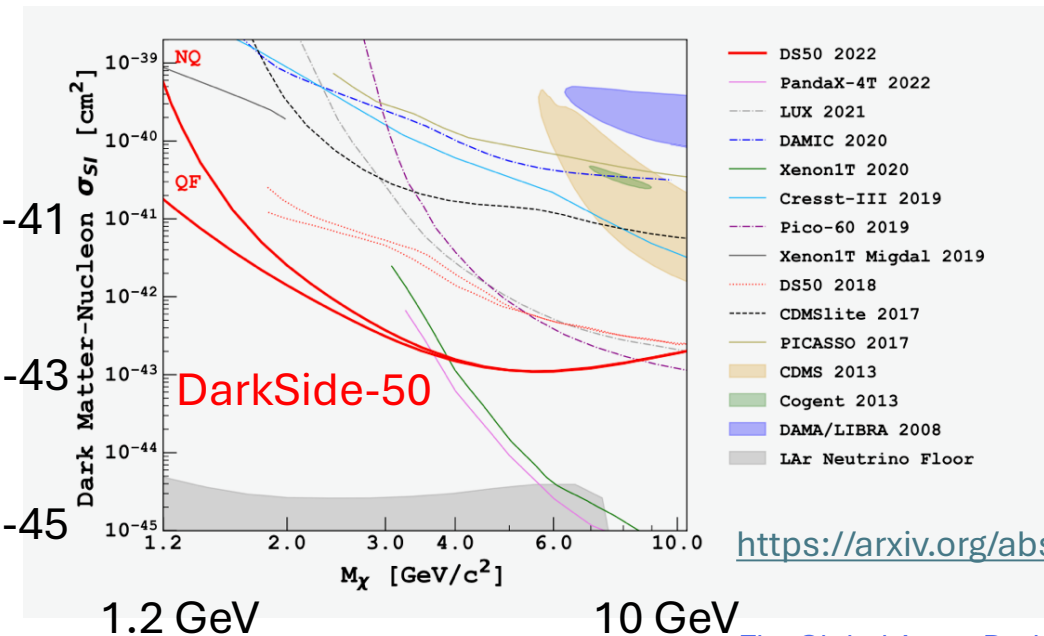

<https://arxiv.org/abs/2207.11966>

